


3"

Architectural LED Downlight- Shallow, Adjustable

EPD-3-SHAL-ADJ

Edison Series

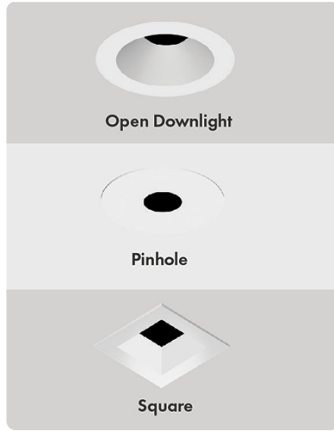

Application

A compact architectural downlight expertly crafted to deliver top-notch quality and uncompromising performance. This fixture offers precise, glare-free illumination and exceptional flexibility. With a single universal housing, it seamlessly accommodates a range of trims and allows for field-changeable optics.

Features

- Full adjustability for beam angles, up to 45 degrees
- Horizontal rotation of up to 365 degrees
- Suitable for high-end architectural, hospitality, commercial, residential, and retail spaces
- The EPD-3 is the cutting-edge solution for small aperture design applications

Nominal Lumens	Delivered Lumens	Wattage
700L	881	10
900L	1037	12
1200L	1392	16
1500L	1527	18
2000L	2509	26

Based on 4000K, 90+ CRI with semi-specular chrome reflector. Actual wattage may vary +/-5%

Lumens	High Performance: 700, 900, 1200, 1500, 2000, 3000 Dims to Warm: 900, 1200, 1500 Xicato Artist: 900, 1200, 1500 Natural Spectrum: 900, 1200, 1500, 2000
CCT & Dynamic Platforms	High Performance: 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K, 27K-18K Xicato Artist: 27K, 30K, 30K-VIB, 35K, 40K Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K
CRI	High Performance: 90+, 98+ Dims to Warm: 90+ Xicato Artist: 98+ Natural Spectrum: 97+
Color Quality	2 Step MacAdam Ellipse
Distributions	SPD (Spot 15°), ND (Narrow 24°), MD (Medium 35°), MWD (Medium Wide 45°), WD (Wide 52°)
Trim Options	Downlight, Lensed Downlight, Adjustable, Lensed Wall Wash, Slot, Pinhole, Self Flanged, Trim-less, Square
Reflector Colors	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WH (White), BK (Black)
Flange Colors	WH (Self-Flanged White)
Dimming	DIM10, LUTH, LUTFTB, ELDO10.1-LIN, ELDODMX.1, ELDODALI.1, DIMTR, BLE-CASAMBI, POE, DIM10-0-OFF, ELDO10-LOG, XSR, DIM10-AUX
Emergency	EMG-LED-10W[(Bodine BSL310)], EMG-LED-20W[(Bodine BSL20)]
Lifetime	L70 at 102,000 Hours
Photometric Tests	In Accordance with IES LM79-08, LM80 and TM-30, TM-21
CCEA Option	For CCEA approved EPD-3 Series, please contact Edison Price Lighting for further information.



3"

EPD-3-SHAL-ADJ

Architectural LED Downlight- Shallow, Adjustable

Edison Series

PART NUMBER: EPD-3-SHAL-ADJ-700L-27K-90-SPD-DIM10-120V

Series	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-3-SHAL-ADJ	700L 900L 1200L 1500L 2000L 3000L	27K 30K 35K 40K 50K ¹	90+ 98+ ²	SPD Spot (15°) ND Narrow (24°) MD Medium (35°) MWD Medium Wide (45°) WD Wide (52°)	DIM10 LUTH LUTFTB ⁴ ELDO10.1-LIN ELDODMX.1 ELDODALI.1 DIMTR ³ BLE-CASAMBI POE DIM10-0-OFF ELDO10-LOG XSR DIM10-AUX	120V 277V MVOLT 347V ⁵	- EMG-LED-10W (Bodine BSL310) EMG-LED-20W (Bodine BSL20)	- CP ⁶ USA

¹ 50K series are available with 85+ CRI only ² 98+ CRI is available in 27K, 30K and 40K only ³ DIMTR available in 120V only ⁴ LUTFTB Available for luminaires up to 1500L ⁵ 347V is available in only DIM10 ⁶ CP Available for luminaires up to 1500L

PART NUMBER: EPD-3-SHAL-ADJ-WDM-30K-18K-900L-90-SPD-DIMTR-120V

Series	Technology	Lumens	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-3-SHAL-ADJ-WDM (Dim to Warm)	30K-18K 30K-22K 27K-18K	900L 1200L 1500L	90+	SPD Spot (15°) ND Narrow (24°) MD Medium (35°) MWD Medium Wide (45°) WD Wide (52°)	DIMTR ¹ DIM10 LUTH ELDO10.1 ELDODALI.1 ELDODMX.1	120V 277V MVOLT 347V ²	- EMG-LED-10W (Bodine BSL310) EMG-LED-20W (Bodine BSL20)	- CP ³ USA

¹ DIMTR available in 120V only ² 347V is available in only DIM10 ³ CP Available for luminaires up to 1500L

3"

EPD-3-SHAL-ADJ

Architectural LED Downlight- Shallow, Adjustable

Edison Series

PART NUMBER: **EPD-3-SHAL-ADJ-XIA-900L-27K-98-SPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-3-SHAL-ADJ-XIA <i>(Xicato Artist)</i>	900L 1200L 1500L	27K 30K 30K-VIB 35K 40K	98+	SPD Spot (15°) ND Narrow (24°) MD Medium (35°) MWD Medium Wide (45°) WD Wide (52°)	DIM10 LUTH LUTFTB⁴ ELDO10.1-LIN ELDODMX.1 ELDODALI.1 DIMTR³ BLE-CASAMBI POE DIM10-0-OFF ELDO10-LOG XSR DIM10-AUX	120V 277V MVOLT 347V³	- EMG-LED-10W <small>(Bodine BSL310)</small> EMG-LED-20W <small>(Bodine BSL20)</small>	- CP⁴ USA

1 DIMTR available in 120V only **2** LUTFTB Available for luminaires up to 1500L **3** 347V is available in only DIM10 **4** CP Available for luminaires up to 1500L

PART NUMBER: **EPD-3-SHAL-ADJ-NSL-900L-27K-97-SPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-3-SHAL-ADJ-NSL <i>(Natural Spectrum)</i>	900L 1200L 1500L 2000L	27K 30K 35K 40K 50K 65K	97+	SPD Spot (15°) ND Narrow (24°) MD Medium (35°) MWD Medium Wide (45°) WD Wide (52°)	DIM10 LUTH LUTFTB⁴ ELDO10.1-LIN ELDODMX.1 ELDODALI.1 DIMTR³ BLE-CASAMBI POE DIM10-0-OFF ELDO10-LOG XSR DIM10-AUX	120V 277V MVOLT 347V³	- EMG-LED-10W <small>(Bodine BSL310)</small> EMG-LED-20W <small>(Bodine BSL20)</small>	- CP⁴ USA

1 DIMTR available in 120V only **2** LUTFTB Available for luminaires up to 1500L **3** 347V is available in only DIM10 **4** CP Available for luminaires up to 1500L











































3"

EPD-3-SHAL-ADJ

Architectural LED Downlight- Shallow, Adjustable

Edison Series

ORDERING GUIDE:

REFLECTOR TYPE				MOUNTING	FINISH	
 EPD-3-132 Open Downlight	 EPD-3-138 Lensed Downlight <small>WET LOCATION</small>	 EPD-3-133 Adjustable	 EPD-3-137 Lensed Wall Wash <small>WET LOCATION</small>	 Round Flanged	 WH-WH White	 BK-WH Black
 EPD-3-130 Slot	 EPD-3-134 Pinhole Downlight				 CL-WH Clear Semi-Spec	 SHZ-WH Satin Haze
 EPD-3-TL-132 Open Downlight	 EPD-3-TL-138 Lensed Downlight <small>WET LOCATION</small>	 EPD-3-TL-133 Adjustable	 EPD-3-TL-137 Lensed Wall Wash <small>WET LOCATION</small>	 Round Trimless	 WH White	 BK Black
 EPD-3-TL-130 Slot	 EPD-3-TL-134 Pinhole Downlight				 CL Clear Semi-Spec	 SHZ Satin Haze
 EPD-3SQ-132 Open Downlight	 EPD-3SQ-138 Lensed Downlight <small>WET LOCATION</small>	 EPD-3SQ-133 Adjustable	 EPD-3SQ-137 Lensed Wall Wash <small>WET LOCATION</small>	 Square Flange	 WH-WH White	 BK-WH Black
 EPD-3SQ-134 Pinhole Downlight					 CL-WH Clear Semi-Spec	 SHZ-WH Satin Haze
 EPD-3SQ-TL-132 Open Downlight	 EPD-3SQ-TL-138 Lensed Downlight <small>WET LOCATION</small>	 EPD-3SQ-TL-133 Adjustable	 EPD-3SQ-TL-137 Lensed Wall Wash <small>WET LOCATION</small>	 Square Trimless	 WH White	 BK Black
 EPD-3SQ-TL-134 Pinhole Downlight					 CL Clear Semi-Spec	 SHZ Satin Haze

Note: The driver and emergency access are only available from the top of the luminaire in trim-less applications. Pinhole and slot options feature a black reflector and white trim only.

COLOR FILTERS:



- EPD-3-LENS-BL
- EPD-3-LENS-GR
- EPD-3-LENS-PI
- EPD-3-LENS-PU
- EPD-3-LENS-DL
- EPD-3-LENS-YE
- EPD-3-LENS-AM
- EPD-3-LENS-OR
- EPD-3-LENS-RE

DISTRUBUTION FILTERS:



- EPD-3-LENS-FR
- EPD-3-LENS-SF
- EPD-3-LENS-CL
- EPD-3-LENS-UV
- EPD-3-LENS-SP
- EPD-3-LENS-HC
- EPD-3-LENS-LI
- EPD-3-LENS-SOL



NOTE: Additional lens filters must only be used on open non-lensed downlight trim options

3"

Architectural LED Downlight- Shallow, Adjustable


EPD-3-SHAL-ADJ

Edison Series

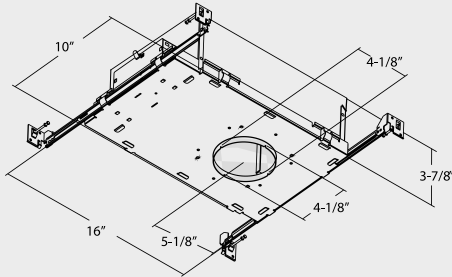

OPTICS


SPD (15°), ND (24°), MD (35°),
MWD (45°), WD (52°)

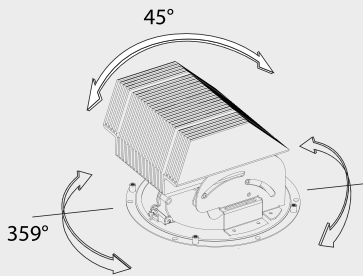

AIMING


Our proprietary hot aiming system, which allows for the precise positioning of the lamp to achieve the optimal beam alignment before the trim installation.

Our specially designed lamp holder ensures that the central beam of the light source emerges correctly from the luminaire, accommodating angles from 0° to 45°.




365° HORIZ. LOCKING

Seamlessly pivots along a 365-degree horizontal rotation within a sleek slotted groove track system.



ADJUSTABILITY

Easy adjustment, without the requirement for tools, allows the luminaire to be positioned at angles of up to 45 degrees, ensuring optimal beam direction and maximum lumen output.



DEGREES

Enables simple on-site adjustments of the luminaires to achieve precision, performance, and versatility. During installation, you can securely set the beam angle in 1-degree increments, with clear markings at every 5-degree interval.



3"

Architectural LED Downlight- Shallow, Adjustable

EPD-3-SHAL-ADJ

Edison Series

Modifications Available

Consult factory for modification requests; orders may require shop drawing approval.

Adjustable

Has full adjustable aiming capability, allowing the double gimbal mechanism to rotate 360°, pivot 90°, and lock into place at any desired position.

Wall Wash

The optical assembly delivers uniform ceiling-to-floor wallwashing without creating any visible scallops. The optical assembly is specially designed to extend a beam in two directions for a uniform floor-to-ceiling and side-to-side wash of light.

Housing / Mounting

- Intended for use in new construction projects and compatible with IC applications, this thermally protected, specification-grade adjustable recessed housing is designed for insulated ceilings where the housing will come into direct contact with insulation. Its die-formed, all-aluminum construction is coated in matte black for optimal heat dissipation, rust prevention, and glare-free illumination.
- The housing offers pre-installed bar hangers that offer flexibility in placement, allowing you to position and secure it within a 24" joist span. You have the option to position them along the long or short axis of the housing, and they can be shortened for 12" joists. If needed, these bar hangers can be adapted for T-Bar spline installation using additional slots and holes for special mounting methods. Additionally, the package includes butterfly brackets, constructed from sturdy 18-gauge steel, which can be vertically adjusted. These butterfly brackets are compatible with various mounting options, including 3/4" or 1-1/2" lathing channel, 1/2" EMT, and optional C-Channel mounting bars.

Flange Option

Die-cast trim rings are powder coated after production and are offered in both white and customizable colors (For custom paint color choices, please contact our factory). The collar and trim rotate together, and all trims come standard with a Solite frosted lens (For more lens options, please get in touch with our factory). These trims are available in Open Downlight, Lensed Downlight, Pinhole Downlight, and Slot styles. Trims can be easily attached.

Trim-less Option

This Die-Cast perforated mesh cover is designed for mounting in drywall or plaster ceilings. It allows for mudding right up to the luminaire opening, ensuring a seamless look. To prevent any damage to the ceiling or drywall during and after installation, a trimless accessory is fastened to the housing. The trims are connected to the housing using piano springs, ensuring a tight fit and eliminating any light leakage. These options are offered in Open Downlight, Lensed Downlight, Pinhole Downlight, and Slot configurations.

Emergency Options/Controls

The test switch for the emergency battery can be installed on the side of the reflector (integral INTG-EMG option), or the test switch can be mounted remotely (EMG-LED option). Self Diagnostic emergency option available (EMG-SDT-LED-10W) Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W or INTG-EMG-LED-10W option & 2000L with EMG-LED-20W or INTG-EMG-LED-20W option in emergency mode. Other accessories and controls systems include modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

Drivers

120/277V 50/60Hz; 347V available. THD < 20%; power factor >.09. Thermally protected. Removal of the reflector provides complete accessibility to the junction box, driver and internal components from above and below the ceiling through the aperture.

Listings

- c-UL-us - Listed for Feed Through Wiring.
- cULus Certified to UL 1598 / C22.2 suitable for Damp/Dry locations, indoor use only
- City of Chicago environmental air (CCEA) marking for plenum applications
- EMI/RFI emissions per FCC 47CFR Part 15 Class B
- RoHS - Contains no mercury or lead and RoHS compliant
- Photometric testing completed in accordance with IES LM-79, LM80 and TM-30 standards
- State of California Title 24 high efficacy LED compliance under JAB
- ENERGY STAR® certified with select trims and housings

Tunable White Option

Tunable White allows the luminaires to be color tuned via various controls. Create the perfect environment for the desired use of the space or mimic the natural color patterns throughout the day and stimulate circadian rhythm. Available in tuning range of 50K-27K (TWH-50K-27K), 65K-27K (TWH-65K-27K), 65K-18K (TWH-LENGN-65K-18K).

Dim to Warm Option

Dims to Warm simulates traditional incandescent halogen lighting through dimming. When the luminaire

RGB + White Option

Refine your space with Mood Master (RGBW & TW), which provides complete control over hue, color temperature, saturation, and dimming for design versatility. RGB + White technology has a white color tuning range from 6500K to 1650K. RGB color range derived from the primary colors red, green and blue is used to create infinite color options in the RGB palette, adding colors together in varying amounts to create new ones. RGB Tunable White technology enables users to adjust the color temperature, adding gradients of saturated colors. No longer restricted to white light LEDs, lighting designers and architects can manipulate a space with desired hues and shades, altering the color temperature of the room, creating the perfect environment. The use of RGB Tunable White technology in allows infinite possibilities for any application

Xicato Artist Series LED Module (XIA)

Powered by Xicato Artist Series®, which are tested to IES TM-30-15, with a color fidelity score (Rf) of 96 and a color gamut score (Rg) of 102, and color shift less than $du'v'$ of 0.003. Featuring cold phosphor technology, improving thermal management enhancing color consistency and delaying lumen depreciation.

Natural Spectrum (NSL)

Natural Spectrum LED option is designed for Human Centric lighting application. Natural Spectrum LEDs diminish blue light peak, similar spectral curve to sunlight, accurate rendering of colors and reduced scattered reflection and glare.

Dimming & Driver Information

DIM10 - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard

LUTH - Lutron LDE1 Hi-Lume Eco System with Soft Fade to Black 1% dimming

LUTFTB - Lutron PEQO Hi-Lume Premier Eco System LED Driver with soft-on fade to black 0.1% dimming

ELDO10.1-LIN - ELDO10-Linear with linear dimming curve.

ELDODMX.1 - EldoLED PowerDrive dimming down to 0.1%. Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

ELDODALI.1 - EldoLED SoloDrive DALI-2. Dimming down to 0.1%

DIMTR - Triac & Electronic low voltage forward phase dimming. Available in 120V only

BLE-CASAMBI - Luminaires may be controlled, grouped, scheduled or placed in scenes, and or zones Via Casambi Bluetooth 4.0 App.

POE - Power-over-Ethernet Depending on the PoE manufacturer selected

DIM10-0-OFF - Program DIM10-to OFF with linear dimming curve 0.1%



3"

Architectural LED Downlight- Shallow, Adjustable

EPD-3-SHAL-ADJ

Edison Series

