
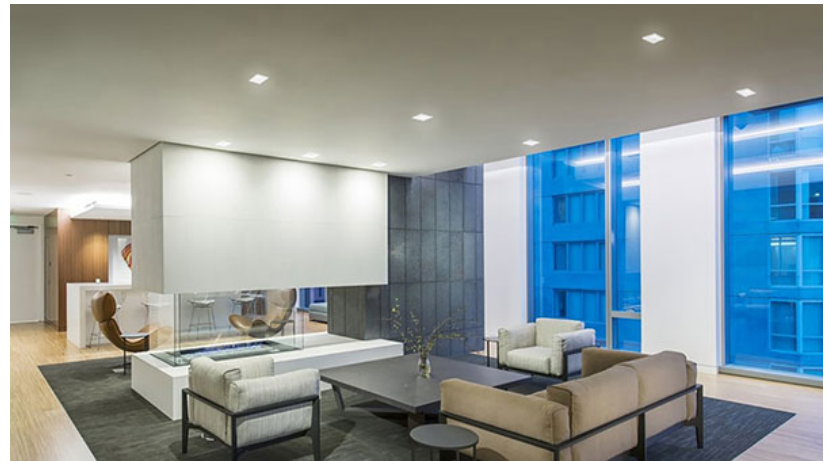


# 4"

## Architectural Square LED Downlight

# EPD-4SQ-RGBW

## Edison Series

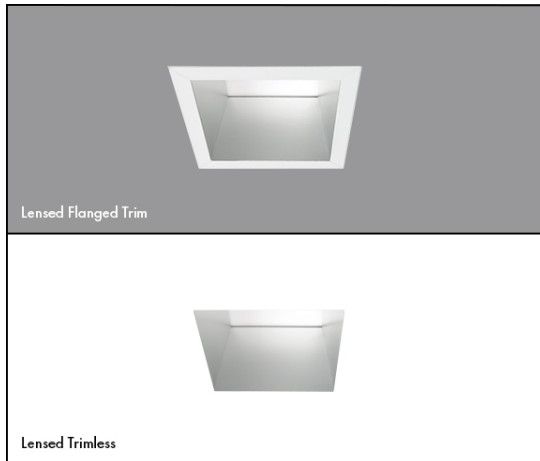

### Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

### Features

- Exceptional Optical Quality: Up to 98 CRI, 1×2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

<b>Lumens</b>	1100
<b>CCT &amp; Dynamic Platforms</b>	Tunable White: 50K-27K or 65K-27K RGB+W: 65K-18K
<b>CRI</b>	90+ Standard
<b>Color Quality</b>	2 Step MacAdam Ellipse
<b>Distributions</b>	MD
<b>Trim Options</b>	Downlight, Wall Wash, Wet Location
<b>Reflector Colors</b>	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), MB (Black), BZ (Bronze)
<b>Flange Colors</b>	Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black), BZ (Bronze)
<b>Emergency</b>	PELI-S-20, PELI-S-100, PELI-S-250, PELI-S-400
<b>Lifetime</b>	L70 at 102,000 Hours
<b>Photometric Tests</b>	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES

Last Update: Sep 19, 2022 - 11:24:09 ©Ali

4"

## Architectural Square LED Downlight

EPD-4SQ-RGBW

Edison Series

PART NUMBER: EPD-4SQ-TWH-50K-27K-900L-90-MD-DIM10-120V
















Series	Technology	Lumens	CRI	Optics	Drivers	Voltage	Emergency	Options	Accessories
EPD-4SQ (Tunable White)	TWH-50K-27K TWH-65K-27K	900L 1200L 1500L 2000L	90+	MD	DIM10 <b>1</b> ELDODALI.1 ELDODMX.1 LUT-PSQ02U <b>2</b> BLE-CASAMBI	120V 277V MVOLT	- EMG-LED-10W EMG-LED-20W INTG-EMG-LED-10W INTG-EMG-LED-20W EMG-SDT-LED-10W	- USA	- EC-WC-TWH-HW-MVOLT

**1** For DIM10 driver you must dedicate two control inputs, one for the Dimming Control and another for CCT Tuning **2** Lutron is the T-Series 2-Channel Tunable White EcoSystem

PART NUMBER: EPD-4SQ-RGBW-LENGN-65K-18K-1100L-90-MD-ELDODMX.1-120V

Series	Technology	Lumens	CRI	Optics	Drivers	Voltage	Emergency	Options
EPD-4SQ (RGB + White)	RGBW-LENGN-65K-18K	1100L	90+	MD	ELDODMX.1	120V 277V MVOLT	- PELI-S-20 PELI-S-100 PELI-S-250 PELI-S-400	- USA

## ORDER GUIDE

ORDER GUIDE		REFLECTOR TYPE	MOUNTING	COLOR			
		REFLECTOR TYPE	MOUNTING	COLOR			
Open Downlight EDP-4SQ-414	Wall Wash EDP-4SQ-407		ANODIZED FLANGED				
			Clear White CL-WH	Satin Haze White SHZ-WH	Black BK-BK		
							
Clear Semi-Spec CL-SCH	White WH-WH		Satin Haze SHZ-SHZ				
							
Clear Black CL-BK	Black White BK-WH		Wheat White WT-WH				
							
Downlight EDP-4SQ-TL-414	Wall Wash EDP-4SQ-TL-407		ANODIZED TRIMLESS				
			White WH	Black BK	Clear CL	Satin Haze SHZ	
							

# 4"

## Architectural Square LED Downlight

# EPD-4SQ-RGBW

## Edison Series

### Modifications Available

Consult factory for modification requests; orders may require shop drawing approval.

### Downlight

Our signature anodized reflector, spun to a reverse parabola design, achieves a 50° shielding angle and a 40° cut-off, which eliminates inter-reflections, and enhances low aperture brightness

### Wall Wash

The optical assembly delivers uniform ceiling-to-floor wallwashing without creating any visible scallops. The optical assembly is specially designed to extend a beam in two directions for a uniform floor-to-ceiling and side-to-side wash of light.

### Optical Performance and Trim

Spun aluminum anodized single piece reflector. The optical system consists of 1) an upper reflector for a precise beam spread; 2) a solite soft focus lens to diffuse the light source for smooth, striation-free distribution; 3) and a patented lens to control the beam angle and provide a 40° visual cutoff. Available in a variety of beam angles. Integral heatsink comes preinstalled on the housing for maximum heat dissipation and locks together with the reflector to prevent zero light leakage for above the ceiling.

### Fully Servicable - Easy Installation & Upgrading

Housing may be installed in ceilings of up to 1-1/2 inch thickness without the use of additional collars. Torsion springs on each side of the reflector hold snug to the ceiling, and allows for fast, easy installation into housing, and fast removal for easy access to the junction box from below the ceiling.

### Trim Design

Luminaire is designed for installation in sheetrock or T-Bar ceilings to achieve a flush trim detail

### Housing / Mounting

16-gauge steel adn can be installed with 3/4" or 1-1/2" lathing channel, 1/2" EMT, or with optional C-channel mounting bars ordered separately. Housing can acomodate ceilings from 1/2" up tp 1 1/2" in thikcness.

### Emergency Options/Controls

The test switch for the emergency battery can be installed on the side of the reflector (integral INTG-EMG option), or the test switch can be mounted remotely (EMG-LED option). Self Diagnostic emergency option available (EMG-SDT-LED-10W) Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W or INTG-EMG-LED-10W option & 2000L with EMG-LED-20W or INTG-EMG-LED-20W option in emergency mode. Other accessories and controls systems include modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

### Driver

RGB+White platform with tuning range of 6500K to 1650K , Saturation and Hue Gradients of color can be added in increments of 1% to fully saturated colors at 100% enabling gamut access to pastels and saturated colors (RGBW- 65K-16K). Control via, DMX-512/RDM.

### Tunable White Option

Tunable White allows the luminaires to be color tuned via various controls. Create the perfect environment for the desired use of the space or mimic the natural color patterns throughout the day and stimulate circadian rhythm. Available in tuning range of 50K-27K (TWH-50K-27K), 65K-27K (TWH-65K-27K) , 65K-18K (TWH-LENGN-65K-18K), or Lumenetix Araya 5 platform 80K-16K (TWH-LTX-80K-16K).

### RGB + White Option

Refine your space with Mood Master (RGBW & TW), which provides complete control over hue, color temperature, saturation, and dimming for design versatility. RGB + White technology has a white color tuning range from 6500K to 1650K. RGB color range derived from the primary colors red, green and blue is used to create infinite color options in the RGB palette, adding colors together in varying amounts to create new ones. RGB Tunable White technology enables users to adjust the color temperature, adding gradients of saturated colors. No longer restricted to white light LEDs, lighting designers and architects can manipulate a space with desired hues and shades, altering the color temperature of the room, creating the perfect environment. The use of RGB Tunable White technology in allows infinite possibilities for any application

### Dimming & Driver Information

**DIM10** - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard

**ELDODALI.1** - EldoLED SoloDrive DALI-2.

Dimming down to 0.1%

**ELDODMX.1** - EldoLED PowerDrive dimming down to 0.1%. Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

**LUT-PSQ02U** - Lutron dual channel T-Series LED Drivers

**BLE-CASAMBI** - Luminaires may be controlled, grouped, scheduled or placed in scenes , and or zones Via Cassambi Bluetooth 4.0 App."



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES