


6"

Architectural LED Downlight - Adjustable/Wall Wash

EPD-6ADJ

Edison Series

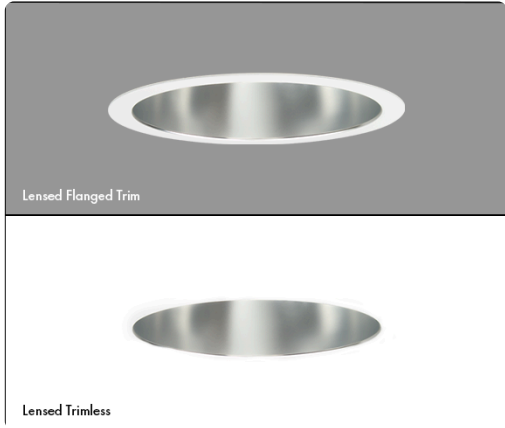

Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

Features

- Exceptional Optical Quality: Up to 98 CRI, 1x2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

Nominal Lumens	Delivered Lumens	Wattage
900L	1065	12
1200L	1398	16
1500L	1785	20
2000L	2252	22
3000L	3374	36
4000L	4649	46
6000L	6696	72

Based on 4000K, 90+ CRI with semi-specular chrome reflector. Actual wattage may vary +/-5%

Lumens	High Performance: 900, 1200, 1500, 2000, 3000, 4000, 6000 Dims to Warm: 900, 1200, 1500, 2000, 3000, 4000 Xicato Artist: 900, 1200, 1500, 2000, 3000 Natural Spectrum: 900, 1200, 1500, 2000, 3000
CCT & Dynamic Platforms	High Performance: 22K, 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K, 27K-18K Xicato Artist: 27K, 30K, 30K-VIB, 35K, 40K Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K
CRI	High Performance: 90+, 98+ Dims to Warm: 90+ Xicato Artist: 98+ Natural Spectrum: 97+
Color Quality	2 Step MacAdam Ellipse
Distributions	NSPD (Narrow Spot 15°), SPD (Spot 24°), ND (Narrow 30°), MD (Medium 36°), MWD (Medium Wide 52°), WD (Wide 60°), VWD (Very Wide 70°)
Trim Options	Adjustable
Reflector Colors	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), MB (Black), BZ (Bronze)
Flange Colors	Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black), BZ (Bronze)
Dimming	DIM10, LUTH, LUTFTB, ELDO10.1-LIN, ELDODMX.1, ELDODALI.1, DIMTR, BLE-CASAMBI, POE, DIM10-0-OFF, ELDO10-LOG, XSR, DIM10-AUX
Emergency	EMG-LED-10W, EMG-LED-20W, INTG-EMG-LED-10W, INTG-EMG-LED-20W, EMG-LED-G2-10W-SDT
Lifetime	L70 at 102,000 Hours
Photometric Tests	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



6"

Architectural LED Downlight - Adjustable/Wall Wash

EPD-6ADJ

Edison Series

PART NUMBER: **EPD-6ADJ-900L-22K-90-NSPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-6ADJ	900L	22K	90+	NSPD Narrow Spot (15°)	DIM10	120V	-	-
	1200L	27K	98+²	SPD Spot (24°)	LUTH	277V	EMG-LED-10W	USA
	1500L	30K		ND Narrow (30°)	LUTFTB⁴	MVOLT	EMG-LED-20W	
	2000L	35K		MD Medium (36°)	ELDO10.1-LIN	347V⁵	INTG-EMG-LED-10W	
	3000L	40K		MWD Medium Wide (52°)	ELDODALI.1		INTG-EMG-LED-20W	
	4000L	50K¹		WD Wide (60°)	DIMTR³		EMG-LED-G2-10W-SDT	
	6000L			VWD Very Wide (70°)	BLE-CASAMBI			
					POE			
					DIM10-O-OFF			
					ELDO10-LOG			
					XSR			
					DIM10-AUX			

¹ 50K series are available with 85+ CRI only ² 98+ CRI is available in 27K, 30K and 40K only ³ DIMTR available for luminaires up to 4000L in 120V only ⁴ LUTFTB Available for luminaires up to 1500L ⁵ 347V is available in only DIM10

PART NUMBER: **EPD-6ADJ-WDM-30K-18K-900L-90-NSPD-DIMTR-120V**

Series	Technology	Lumens	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-6ADJ-WDM <i>(Dim to Warm)</i>	30K-18K	900L	90+	NSPD Narrow Spot (15°)	DIMTR¹	120V	-	-
	30K-22K	1200L		SPD Spot (24°)	DIM10	277V	EMG-LED-10W	USA
	27K-18K	1500L		ND Narrow (30°)	LUTH	MVOLT	EMG-LED-20W	
		2000L		MD Medium (36°)	ELDO10.1	347V²	INTG-EMG-LED-10W	
		3000L		MWD Medium Wide (52°)	ELDODALI.1		INTG-EMG-LED-20W	
		4000L		WD Wide (60°)	ELDODMX.1		EMG-LED-G2-10W-SDT	
				VWD Very Wide (70°)				

¹ DIMTR available in 120V only ² 347V is available in only DIM10

6"

Architectural LED Downlight - Adjustable/Wall Wash

EPD-6ADJ

Edison Series

PART NUMBER: EPD-6ADJ-XIA-900L-27K-98-NSPD-DIM10-120V

Series	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-6ADJ-XIA <i>(Xicato Artist)</i>	900L 1200L 1500L 2000L 3000L	27K 30K 30K-VIB 35K 40K	98+	NSPD Narrow Spot (15°) SPD Spot (24°) ND Narrow (30°) MD Medium (36°) MWD Medium Wide (52°) WD Wide (60°) VWD Very Wide (70°)	DIM10 LUTH LUTFTB⁴ ELDO10.1-LIN ELDODMX.1 ELDODALI.1 DIMTR³ BLE-CASAMBI POE DIM10-0-OFF ELDO10-LOG XSR DIM10-AUX	120V 277V MVOLT 347V³	- EMG-LED-10W EMG-LED-20W INTG-EMG-LED-10W INTG-EMG-LED-20W EMG-LED-G2-10W-SDT	- USA

¹ DIMTR available in 120V only ² LUTFTB Available for luminaires up to 1500L ³ 347V is available in only DIM10

PART NUMBER: EPD-6ADJ-NSL-900L-27K-97-NSPD-DIM10-120V

Series	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options
EPD-6ADJ-NSL <i>(Natural Spectrum)</i>	900L 1200L 1500L 2000L 3000L	27K 30K 35K 40K 50K 65K	97+	NSPD Narrow Spot (15°) SPD Spot (24°) ND Narrow (30°) MD Medium (36°) MWD Medium Wide (52°) WD Wide (60°) VWD Very Wide (70°)	DIM10 LUTH LUTFTB⁴ ELDO10.1-LIN ELDODMX.1 ELDODALI.1 DIMTR³ BLE-CASAMBI POE DIM10-0-OFF ELDO10-LOG XSR DIM10-AUX	120V 277V MVOLT 347V³	- EMG-LED-10W EMG-LED-20W INTG-EMG-LED-10W INTG-EMG-LED-20W EMG-LED-G2-10W-SDT	- USA

¹ DIMTR available in 120V only ² LUTFTB Available for luminaires up to 1500L ³ 347V is available in only DIM10

6"

Architectural LED Downlight - Adjustable/Wall Wash

EPD-6ADJ Edison Series

ORDER GUIDE

REFLECTOR TYPE

MOUNTING

COLOR

REFLECTOR TYPE

MOUNTING

COLOR

Accent Adjustable
EPD-6ADJ-HL-655



Flanged



ANODIZED FLANGED

Clear White
CL-WH



Satin Haze White
SHZ-WH



Black
BK-BK



Clear Semi-Spec
CL-SCH



White
W-WH



Satin Haze
SHZ-SHZ



Bronze
BZ-BZ



Black White
BK-WH



Accent Adjustable
EPD-6ADJ-TL-663



Trimless



ANODIZED TRIMLESS

White
WH



Black
BK



Clear
CL



Satin Haze
SHZ



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES

6"

EPD-6ADJ

Architectural LED Downlight - Adjustable/Wall Wash

Edison Series

Modifications Available

Consult factory for modification requests; orders may require shop drawing approval.

Downlight

Our signature anodized reflector, spun to a reverse parabola design, achieves a 50° shielding angle and a 40° cut-off, which eliminates inter-reflections, and enhances low aperture brightness

Adjustable

Has full adjustable aiming capability, allowing the double gimbal mechanism to rotate 360°, pivot 90°, and lock into place at any desired position.

Optical Performance and Trim

Spun aluminum anodized single piece reflector. The optical system consists of 1) an upper reflector for a precise beam spread; 2) a solite soft focus lens to diffuse the light source for smooth, striation-free distribution; 3) and a patented lens to control the beam angle and provide a 40° visual cutoff.

Available in a variety of beam angles. Integral heatsink comes preinstalled on the housing for maximum heat dissipation and locks together with the reflector to prevent zero light leakage for above the ceiling.

Fully Servicable - Easy Installation & Upgrading

Housing maybe installed in ceilings of up to 1-1/2 inch thickness without the use of additional collars. Torsion springs on EPCh side of the reflector hold snug to the ceiling, and allows for fast, easy installation into housing, and fast removal for easy access to the junction box from below the ceiling.

Trim Design

Luminaire is designed for installation in sheetrock or T-Bar ceilings to achieve a flush trim detail.

- Trimless option has a perforated face. Installation includes the application of drywall compound over the luminaire's integral spackle screen to the rim of its integral plaster ring.

Housing / Mounting

16-gauge steel, preassembled one-piece construction with integral 27" C-channel mounting brackets included. Mounting brackets may be adjusted up to 28" horizontally, and 2-3/4" vertically, and locking into place.

Emergency Options/Controls

The test switch for the emergency battery can be installed on the side of the reflector (integral INTG-EMG option), or the test switch can be mounted remotely (EMG-LED option). Self Diagnostic emergency option available (EMG-SDT-LED-10W) Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W or INTG-EMG-LED-10W option & 2000L with EMG-LED-20W or INTG-EMG-LED-20W option in emergency mode. Other accessories and controls systems include modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

Drivers

120/277V 50/60Hz; 347V available. THD < 20%; power factor >.09. Thermally protected. Removal of the reflector provides complete accessibility to the junction box, driver and internal components from above and below the ceiling through the aperture.

Dim to Warm Option

Dims to Warm simulates traditional incandescent halogen lighting through dimming. When the luminaire dims to warm from 100% to .1%, it makes a smooth transition across the black body radiator while maintaining a constant CRI of 90+. Available in 30K-18K, 30K-22K or 27K-18K range.

Xicato Artistt Series LED Module (XIA)

Powered by Xicato Artist Series®, which are tested to IES TM-30-15, with a color fidelity score (Rf) of 96 and a color gamut score (Rg) of 102, and color shift less than du'v' of 0.003. Featuring cold phosphor technology, improving thermal management enhancing color consistency and delaying lumen depreciation.

Natural Spectrum (NSL)

Natural Spectrum LED option id designed for Human Centric lighting application. Natural Spectrum LEDs diminish blue light peak, similar spectral curve to sunlight, accurate rendering of colors and reduced scattered reflection and glare.

Dimming & Driver Information

DIM10 - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard

LUTH - Lutron LDE1 Hi-Lume Eco System with Soft Fade to Black 1% dimming

LUTFTB - Lutron PEQO Hi-Lume Premier Eco System LED Driver with soft-on fade to black 0.1% dimming

ELDO10.1-LIN - ELDO10-Linear with linear dimming curve.

ELDODMX.1 - EldoLED PowerDrive dimming down to 0.1%. Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

ELDODALI.1 - EldoLED SoloDrive DALI-2. Dimming down to 0.1%

DIMTR - Triac & Electronic low voltage forwardp hase dimming. Available in 120V only

BLE-CASAMBI - Luminaires may be controlled, grouped, scheduled or placed in scenes , and or zones Via Cassambi Bluetooth 4.0 App.

POE - Power-over-Ethernet Depending on the PoE manufacturer selected

DIM10-0-OFF - Program DIM10-to OFF withlinear dimming curve 0.1%

ELDO10-LOG - ELDO10-LOG with logarithmic dimming curve.

XSR - Xitanium SR Dimming

DIM10-AUX - 0-10V with Auxiliry power

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%



6"

Architectural LED Downlight - Adjustable/Wall Wash

EPD-6ADJ

Edison Series

Flanged

Trim Less

