

Maxima

Track Mounted LED 5° Spotlight

MX-VNSP



OH



OG

Applications

MAX is a family of gracefully proportioned cylinders designed for low to very high ceilings. Accentuating an unobtrusive form, lightweight durability, and glare-less illumination, MAX cylinders never distract from art or architecture.

Features

- Signature Low Aperture Brightness: Expertly engineered optical system produces extremely low aperture brightness, desired by museums, galleries, and other architectural applications
- A concealed swivel provides 385° horizontal rotation and 0-90° tilt. The swivel is permanently tensioned, allowing the luminaire to remain fixed at the desired angle
- A tight 5° beam achieving a very powerful spot up to 116,844 CBCP
- Easy Focusing: Position Maximas with one hand without manipulating a lever or using a tool

Ring Baffle (MX-VNSP-OG)

- A specially designed Ring Baffle refines the beam by eliminating stray light and enhancing glare control for a very focused, crisp spotlight
- Ring Baffle trims all light beyond 5°, achieving up to 116,844 CBCP

Open Aperture (MX-VNSP-OH)

Open Aperture (OH) for maximum efficacy; for use with interchangeable reflectors in a variety of beam spreads.

Notable Projects

Hammer Museum
Wrightwood 659
Asia Society

Series	MX-VNSP-OH (Open Aperture), MX-VNSP-OG (Ring Baffle)
Complete Family	Standard (MX), Narrow Spot (MX-NSP), Very Narrow Spot (MX-VNSP), Wallwash (MX-W)
Lumens	1200, 1500, 2000
CCT	27K, 30K, 35K, 40K, 50K
CRI	90+ Standard, XIA-95+
SDCM	2-Step MacAdam Ellipse
Optics / Beam Angles	5°
Finish	White, Black, Silver, RAL
Dimming	DIMTR
Voltage	120V, 277V (Non-Dimmable)
Lifetime	L70 at 50000 Hours
Listing	cSAus, c-UL-us



Maxima

MX-VNSP

Track Mounted LED 5° Spotlight

EXAMPLE: **MX-VNSP-OH-1200L-27K-90-5D-DIMTR-120V-WH**

Series	Aperture Assembly	Lumens	CCT	CRI	Optics	Driver	Voltage	Finish	Options	Optical Accessories
MX-VNSP	OH	1200L	27K	90+	5D	DIMTR	120V	WH	-	-
	(Open Aperture)	1500L	30K	XIA-95+	NON-DIM	277V <small>(Non-Dim Only)</small>	BK	SW	SA	OA-MX-VNSP-SOL
	OG	2000L	35K							OA-MX-VNSP-SL20X55
	(Ring Baffle)		40K							OA-MX-VNSP-SL40X70
			50K							OA-MX-VNSP-SL30
			OA-MX-VNSP-SL70							
			<small>(50K Is Not Compatible with XIA-95+)</small>							OA-MX-VNSP-BM
										OA-MX-VNSP-LRS67
										OA-MX-VNSP-LRS50

Note: All extra optical accessories, aperture assemblies, and optics can be ordered separately. Check [EPL Website](#) for ordering nomenclature.

Optical Purity

- Ridged pattern on the inner surface of the external reflector transmits the beam spread
- A beam smoother softens the light and comes standard; may be replaced with up to 2 optical accessories

Twist-and-Lock Optical Reflector

Field-interchangeable internal 'twist-and-lock' reflector is available in a variety of beam spreads – enabling the same luminaire to accommodate different optical distributions.

Interchangeable Optical Accessories

- Combine optical accessories to effortlessly alter visual effects in the field
- The optical assembly accepts up to 2 optical accessories

Track Adaptor – Fully Concealed, Durable Locking

- Stainless steel clips lock fixture into our specially designed track systems. Two 'click' sounds indicate the fixture is secured into the track system
- Clips bite into aluminum, giving extremely durable ground connection
- Edison Price Lighting track systems are designed to completely conceal the adaptor for a clean profile
- Adaptors are shipped standard with all track fixtures. A Eutrac track adaptor can be used for mounting to Eutrac; 0-10V and DALI compatibility available. Contact factory for details

Seamless Installation

Fixtures may be configured to mount to any Edison Price Lighting recessed, suspended, surface-mounted track systems: [Sightline](#), [Highline](#), [Upline](#), [Autobus](#), [Eutrac](#), and [Unicep](#).

Anodized Construction

Heatsink is fabricated from extruded aluminum then undergoes a meticulous anodization process for a permanent and beautiful finish – increasing corrosion and heat resistance for long-lasting durability.

Carefully Applied, Low-VOC Finish

All Edison Price Lighting track fixtures are painted standard with low-VOC water-based paint – diminishing the release of toxic fumes – enhancing air quality and occupant health (unlike solvent-based paint).

Optical Accessories

- OA-MX-VNSP-SOL** (Solite Lens) - Stipple-patterned lens to appreciably diffuse the light
- OA-MX-VNSP-SL20X55** (20° x 55° Spread Lens) - Delivers a rectangular beam recommended for illuminating medium-sized artwork
- OA-MX-VNSP-SL40X70** (40° x 70° Spread Lens) - Delivers a rectangular beam recommended for illuminating wider artwork
- OA-MX-VNSP-SL30** (30° Spread Lens) - One-way 30° lateral lens recommended for use with an object light; based on internal beam spread, can elongate the light source vertically or side-to-side
- OA-MX-VNSP-SL70** (70° Spread Lens) - One-way 70° lateral lens recommended for use with an object light; based on internal beam spread, can elongate the light source vertically or side-to-side
- OA-MX-VNSP-BM** (Beam Smoother) - Removes striations from the light source for a subtle wash of light
- OA-MX-VNSP-LRS67** (67% Light Reduction Screen) - Reduces light by 67%, emitting 33% of total light; alternative to dimming
- OA-MX-VNSP-LRS50** (50% Light Reduction Screen) - Reduces light by 50%, emitting 50% of total light; alternative to dimming
- OA-MX-VNSP-DBL** (Daylight Blue) - Simulates daylight; ideal for museums, residential, & commercial
- OA-MX-VNSP-PK** (Surprise Pink) - Complements skin tones; perfect for hospitality applications
- OA-MX-VNSP-AMB** - Amber Color Filter
- OA-MX-VNSP-BL** - Blue Color Filter
- OA-MX-VNSP-GR** - Green Color Filter
- OA-MX-VNSP-RD** - Red Color Filter
- OA-MX-VNSP-RAL** (Rosco Custom Color) - Consult factory for a brilliant Rosco filter in any color. Click [here](#) to see more information on color filters selection

XIA-95+ (Xicato)

- XTM Artist Series, XIM Integral Bluetooth Module (BLE + LED), or XOB (COB array light source in as small as 4.5mm form and up to 8300 lumens)
 - Best color-matching: within 1 x 2 MacAdam Ellipse
 - Up to 95+ CIE CRI
- Module varies by product family and fixture function.

Options

- Option for on/off rocker switch on top of the fixture, for use on 120V track only

Driver

120/277V 50/60Hz; Flicker-free 1% dimming standard; THD < 20%; power factor >.09. Thermally protected.

Dimming & Driver Information

DIMTR - Triac, incandescent, and electronic low voltage (ELV) dimming down to 5% in 120V only
NON-DIM - 120 or 277V Non-Dimming Control

Warranty

Five-year warranty not including providing extraordinary means of access, such as scaffolding or lifts, to service our products.

Listings







- cSAus
- c-UL-us



Maxima

Track Mounted LED 5° Spotlight

MX-VNSP

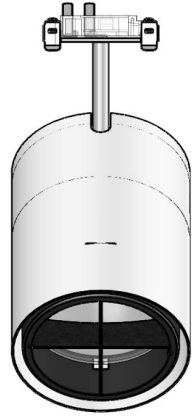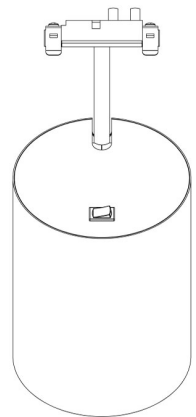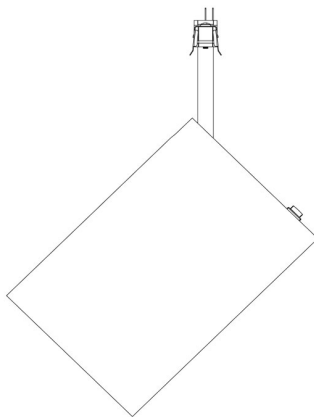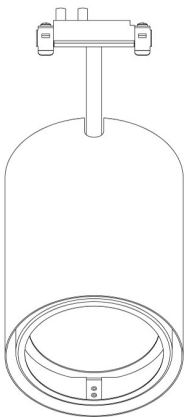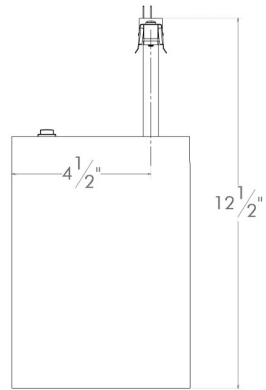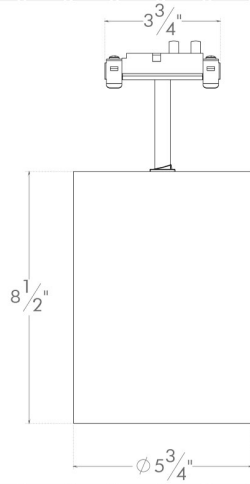

(OH)

(OG)

(OX)

