


# 4"

## Architectural LED Downlight - Adjustable/Wall Wash

EPD-4ADJ  
Edison Series

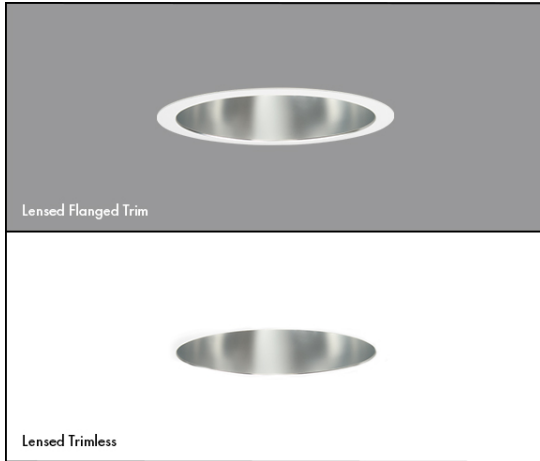

### Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

### Features

- Exceptional Optical Quality: Up to 98 CRI, 1×2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

<b>Lumens</b>	900, 1200, 1500, 2000, 3000
<b>CCT &amp; Dynamic Platforms</b>	22K, 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K or 27K-18K Xicato Artist: 27K, 30K, 35K, 40K, 30K-VIB Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K
<b>CRI</b>	90+ Standard, 98+ <sup>2</sup>
<b>Color Quality</b>	2 Step MacAdam Ellipse
<b>Distributions</b>	NSPD (15°), SPD (24°), ND (30°), MD (36°), MWD (52°), WD (60°), VWD (70°)
<b>Trim Options</b>	Adjustable
<b>Reflector Colors</b>	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), MB (Black), BZ (Bronze)
<b>Flange Colors</b>	Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black), BZ (Bronze)
<b>Dimming</b>	DIM10, LUTH, LUT2W <sup>3</sup> , LUTFTB <sup>4</sup> , ELDO10.1, ELDODMX.1, ELDODALI.1, DIMTR <sup>3</sup> , BLE-CASAMBI
<b>Emergency</b>	EMG-LED-10W, EMG-LED-20W, INTG-EMG-LED-10W, INTG-EMG-LED-20W, EMG-SDT-LED-10W
<b>Lifetime</b>	L70 at 102,000 Hours
<b>Photometric Tests</b>	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



# 4"

# EPD-4ADJ Edison Series

Architectural LED Downlight - Adjustable/Wall Wash

PART NUMBER: **EPD-4ADJ-900L-22K-90-NSPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-4ADJ</b>	<b>900L</b>	<b>22K</b>	<b>90+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
	<b>1200L</b>	<b>27K</b>	<b>98+ 2</b>	<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
	<b>1500L</b>	<b>30K</b>		<b>ND</b>	<b>LUT2W 3</b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
	<b>2000L</b>	<b>35K</b>		<b>MD</b>	<b>LUTFTB 4</b>	<b>347V 5</b>	<b>INTG-EMG-LED-10W</b>	
	<b>3000L</b>	<b>40K</b>		<b>MWD</b>	<b>ELDO10.1</b>		<b>INTG-EMG-LED-20W</b>	
	<b>50K 1</b>		<b>WD</b>	<b>ELDODMX.1</b>		<b>EMG-SDT-LED-10W</b>		
			<b>VWD</b>	<b>ELDODALI.1</b>	<b>DIMTR 3</b>			
				<b>VWD</b>	<b>BLE-CASAMBI</b>			

1 50K series are available with 85+ CRI only 2 98+ CRI is available in 27K, 30K and 40K only 3 DIMTR and LUT2W available in 120V only 4 LUTFTB Available for luminaires up to 1500L 5 347V is available in only DIM10

PART NUMBER: **EPD-4ADJ-WDM-30K-18K-900L-90-NSPD-DIM10-120V**

Series	Technology	Lumens	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-4ADJ</b> <i>(Dim to Warm)</i>	<b>WDM-30K-18K</b>	<b>900L</b>	<b>90+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
	<b>WDM-30K-22K</b>	<b>1200L</b>		<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
	<b>WDM-27K-18K</b>	<b>1500L</b>		<b>ND</b>	<b>LUT2W 1</b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
		<b>2000L</b>		<b>MD</b>	<b>LUTFTB 2</b>		<b>INTG-EMG-LED-10W</b>	
				<b>MWD</b>	<b>DIMTR 1</b>		<b>INTG-EMG-LED-20W</b>	
			<b>WD</b>	<b>ELDO10.1</b>		<b>EMG-SDT-LED-10W</b>		
			<b>VWD</b>	<b>ELDODALI.1</b>	<b>ELDODMX.1</b>			
				<b>VWD</b>	<b>BLE-CASAMBI</b>			

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 CP Available for luminaires up to 1500L

PART NUMBER: **EPD-4ADJ-XIA-900L-27K-98-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-4ADJ</b> <i>(Xicato Artist)</i>	<b>XIA</b>	<b>900L</b>	<b>27K</b>	<b>98+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
		<b>1200L</b>	<b>30K</b>		<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
		<b>1500L</b>	<b>30K-VIB</b>		<b>ND</b>	<b>LUT2W 1</b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
			<b>35K</b>		<b>MD</b>	<b>LUTFTB 2</b>	<b>347V 3</b>	<b>INTG-EMG-LED-10W</b>	
		<b>40K</b>		<b>MWD</b>	<b>ELDO10.1</b>		<b>INTG-EMG-LED-20W</b>		
			<b>WD</b>	<b>ELDODMX.1</b>		<b>EMG-SDT-LED-10W</b>			
			<b>VWD</b>	<b>ELDODALI.1</b>	<b>DIMTR 1</b>				
				<b>VWD</b>	<b>BLE-CASAMBI</b>				

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 347V is available in only DIM10

# 4"

## Architectural LED Downlight - Adjustable/Wall Wash
















# EPD-4ADJ Edison Series

PART NUMBER: **EPD-4ADJ-NSL-900L-27K-97-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-4ADJ</b> <i>(Natural Spectrum)</i>	NSL	900L	27K	97+	NSPD	DIM10	120V	-	-
		1200L	30K		SPD	LUTH	277V	EMG-LED-10W	USA
		1500L	35K		ND	LUT2W <sup>1</sup>	MVOLT	EMG-LED-20W	
		2000L	40K		MD	LUTFB <sup>2</sup>	347V <sup>3</sup>	INTG-EMG-LED-10W	
		50K	MWD		ELDO10.1	INTG-EMG-LED-20W			
		65K	WD		ELDODMX.1	EMG-SDT-LED-10W			
			VWD	ELDODALI.1					
					DIMTR <sup>1</sup>				
					BLE-CASAMBI				

<sup>1</sup> DIMTR and LUT2W available in 120V only   <sup>2</sup> LUTFB Available for luminaires up to 1500L   <sup>3</sup> 347V is available in only DIM10

### ORDER GUIDE

REFLECTOR TYPE	MOUNTING	COLOR	
<b>Accent Adjustable</b> EPD-4ADJ-455 	<b>Flanged</b> 	<b>ANODIZED FLANGED</b> Clear White CL-WH  Satin Haze White SHZ-WH  Black BK-BK 	
		Clear Semi-Spec CL-SCH  White WH-WH  Satin Haze SHZ-SHZ 	
		Clear Black CL-BK  Black White BK-WH  Wheat White WT-WH 	
		<b>Trimless</b> 	White WH  Black BK  Clear CL  Satin Haze SHZ 