
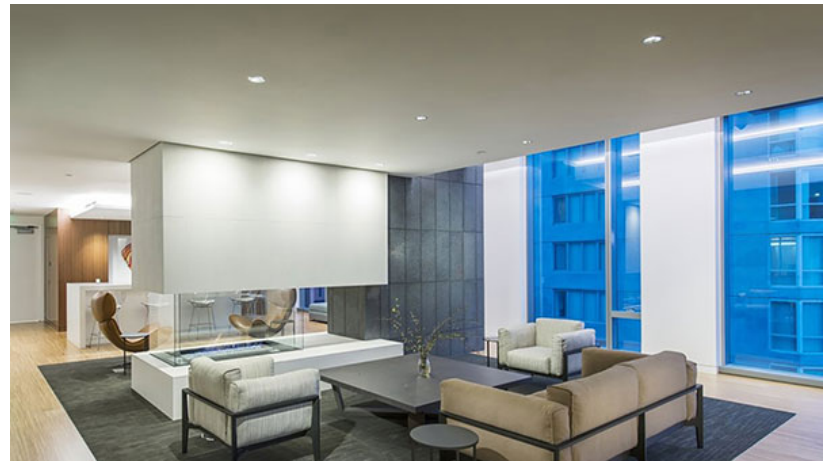


4"

Architectural LED Downlight - IC Rated

EPD-4IC

Edison Series

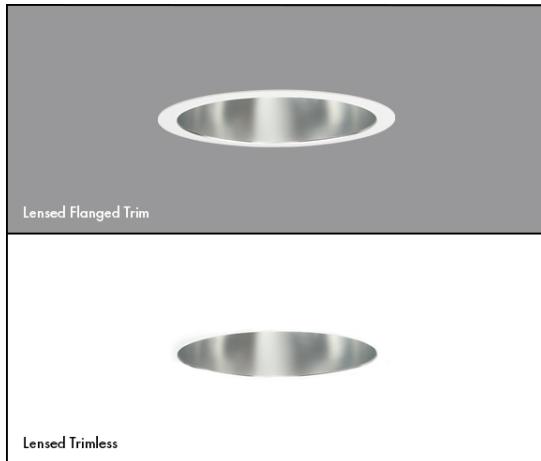

Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

Features

- Exceptional Optical Quality: Up to 98 CRI, 1×2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

Lumens	900, 1200
CCT & Dynamic Platforms	22K, 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K or 27K-18K Xicato Artist: 27K, 30K, 35K, 40K, 30K-VIB Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K
CRI	90+ Standard, 98+ ^{^2}
Color Quality	2 Step MacAdam Ellipse
Distributions	NSPD (15°), SPD (24°), ND (30°), MD (36°), MWD (52°), WD (60°), VWD (70°)
Trim Options	Downlight, Wall Wash, Double Wall Wash, Corner Wall Wash, Wet Location
Reflector Colors	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), BK (Black), BZ (Bronze)
Flange Colors	TL (Trimless), WH (Self-Flanged White), SCH (Self-Flanged Semi-Specular Chrome), SHZ (Self-Flanged Low Iridescent Satin Haze), BK (Self-Flanged Black), BZ (Self-Flanged Bronze)
Dimming	DIM10, LUTH, LUT2W ^{^3} , LUTFTB ^{^4} , ELDO10.1, ELDODMX.1, ELDODALI.1, DIMTR ^{^3} , BLE-CASAMBI
Emergency	EMG-LED-10W, EMG-LED-20W, INTG-EMG-LED-10W, INTG-EMG-LED-20W, EMG-SDT-LED-10W
Lifetime	L70 at 102,000 Hours
Photometric Tests	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



4"

EPD-4IC

Edison Series

Architectural LED Downlight - IC Rated

PART NUMBER: **EPD-4IC-900L-22K-90-NSPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
EPD-4IC	900L	22K	90+	NSPD	DIM10	120V	-	-
	1200L	27K	98+ 2	SPD	LUTH	277V	EMG-LED-10W	USA
		30K	ND	LUT2W 3	MVOLT	EMG-LED-20W		
		35K	MD	LUTFTB 4	347V 5	INTG-EMG-LED-10W		
		40K	MWD	ELDO10.1	INTG-EMG-LED-20W			
		50K 1	WD	ELDODMX.1	EMG-SDT-LED-10W			
VWD	ELDODALI.1							
			DIMTR 3					
			BLE-CASAMBI					

1 50K series are available with 85+ CRI only 2 98+ CRI is available in 27K, 30K and 40K only 3 DIMTR and LUT2W available in 120V only 4 LUTFTB Available for luminaires up to 1500L 5 347V is available in only DIM10

PART NUMBER: **EPD-4IC-WDM-30K-18K-900L-90-NSPD-DIM10-120V**

Series	Technology	Lumens	CRI	Optics	Drivers	Voltage	Emergency	Options
EPD-4IC <i>(Dim to Warm)</i>	WDM-30K-18K	900L	90+	NSPD	DIM10	120V	-	-
	WDM-30K-22K	1200L	SPD	LUTH	277V	EMG-LED-10W	USA	
			ND	LUT2W 1	MVOLT	EMG-LED-20W		
			MD	LUTFTB 2	INTG-EMG-LED-10W			
			MWD	DIMTR 1	INTG-EMG-LED-20W			
			WD	ELDO10.1	EMG-SDT-LED-10W			
VWD	ELDODALI.1							
			ELDODMX.1					
			BLE-CASAMBI					

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 CP Available for luminaires up to 1500L

PART NUMBER: **EPD-4IC-XIA-900L-27K-98-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
EPD-4IC <i>(Xicato Artist)</i>	XIA	900L	27K	98+	NSPD	DIM10	120V	-	-
		1200L	30K	SPD	LUTH	277V	EMG-LED-10W	USA	
			30K-VIB	ND	LUT2W 1	MVOLT	EMG-LED-20W		
				35K	MD	LUTFTB 2	347V 3		INTG-EMG-LED-10W
			40K	MWD	ELDO10.1	INTG-EMG-LED-20W			
			WD	ELDODMX.1	EMG-SDT-LED-10W				
VWD	ELDODALI.1								
			DIMTR 1						
			BLE-CASAMBI						

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 347V is available in only DIM10

4"

Architectural LED Downlight - IC Rated


























EPD-4IC Edison Series

PART NUMBER: **EPD-4IC-NSL-900L-27K-97-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
EPD-4IC <i>(Natural Spectrum)</i>	NSL	900L	27K	97+	NSPD	DIM10	120V	-	-
		1200L	30K		SPD	LUTH	277V	EMG-LED-10W	USA
			35K		ND	LUT2W ¹	MVOLT	EMG-LED-20W	
			40K		MD	LUTFB ²	347V ³	INTG-EMG-LED-10W	
			50K		MWD	ELDO10.1		INTG-EMG-LED-20W	
			65K		WD	ELDODMX.1		EMG-SDT-LED-10W	
			VWD	ELDODALI.1					
					DIMTR ¹				
					BLE-CASAMBI				

¹ DIMTR and LUT2W available in 120V only ² LUTFB Available for luminaires up to 1500L ³ 347V is available in only DIM10

ORDER GUIDE

REFLECTOR TYPE				MOUNTING	COLOR				
REFLECTOR TYPE				MOUNTING	COLOR				
Open Downlight EPD-4-401	Wall Wash EPD-4-407	Double Wall Wash EPD-4-477	Corner Wall Wash ?	Flanged 	ANODIZED FLANGED				
					Clear White CL-WH 	Clear Bronze CL-BZ 	Black White BK-WH 	Satin Haze SHZ-SHZ 	Wheat WT-WT 
					Clear Semi-Spec CL-SCH 	Satin Haze White SHZ-WH 	Black BK-BK 	Satin Haze Black SHZ-BK 	
					Clear Black CL-BK 	White WH-WH 	Bronze BZ-BZ 	Wheat White WT-WH 	
Open Downlight EPD-4-TL-401	Wall Wash EPD-4-TL-407			Trimless 	ANODIZED TRIMLESS				
					White WH 	Black BK 	Clear CL 	Satin Haze SHZ 	



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES

4"

Architectural LED Downlight - IC Rated

EPD-4IC Edison Series

FLANGED

