


# 5"

## Architectural LED Downlight - Retrofit

# EPD-J5

## Edison Series

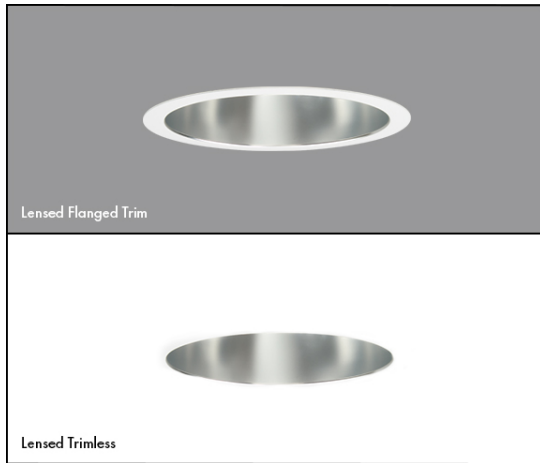

### Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

### Features

- Exceptional Optical Quality: Up to 98 CRI, 1×2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

<b>Lumens</b>	900, 1200, 1500, 2000, 3000
<b>CCT &amp; Dynamic Platforms</b>	22K, 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K or 27K-18K Xicato Artist: 27K, 30K, 35K, 40K, 30K-VIB Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K
<b>CRI</b>	90+ Standard, 98+ <sup>^2</sup>
<b>Color Quality</b>	2 Step MacAdam Ellipse
<b>Distributions</b>	NSPD (15°), SPD (24°), ND (30°), MD (36°), MWD (52°), WD (60°), VWD (70°)
<b>Trim Options</b>	Downlight, Wall Wash, Double Wall Wash, Corner Wall Wash, Wet Location
<b>Reflector Colors</b>	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), BK (Black), BZ (Bronze)
<b>Flange Colors</b>	TL (Trimless), WH (Self-Flanged White), SCH (Self-Flanged Semi-Specular Chrome), SHZ (Self-Flanged Low Iridescent Satin Haze), BK (Self-Flanged Black), BZ (Self-Flanged Bronze)
<b>Dimming</b>	DIM10, LUTH, LUT2W <sup>^3</sup> , LUTFTB <sup>^4</sup> , ELDO10.1, ELDODMX.1, ELDODALI.1, DIMTR <sup>^3</sup> , BLE-CASAMBI
<b>Emergency</b>	EMG-LED-10W, EMG-LED-20W, INTG-EMG-LED-10W, INTG-EMG-LED-20W, EMG-SDT-LED-10W
<b>Lifetime</b>	L70 at 102,000 Hours
<b>Photometric Tests</b>	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



# 5"

# EPD-J5

## Edison Series

### Architectural LED Downlight - Retrofit

PART NUMBER: **EPD-J5-900L-22K-90-NSPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-J5</b>	<b>900L</b>	<b>22K</b>	<b>90+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
	<b>1200L</b>	<b>27K</b>	<b>98+<sup>2</sup></b>	<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
	<b>1500L</b>	<b>30K</b>		<b>ND</b>	<b>LUT2W<sup>3</sup></b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
	<b>2000L</b>	<b>35K</b>		<b>MD</b>	<b>LUTFTB<sup>4</sup></b>	<b>347V<sup>5</sup></b>	<b>INTG-EMG-LED-10W</b>	
	<b>3000L</b>	<b>40K</b>		<b>MWD</b>	<b>ELDO10.1</b>		<b>INTG-EMG-LED-20W</b>	
	<b>50K<sup>1</sup></b>		<b>WD</b>	<b>ELDODMX.1</b>		<b>EMG-SDT-LED-10W</b>		
			<b>VWD</b>	<b>ELDODALI.1</b>				
				<b>DIMTR<sup>3</sup></b>				
				<b>BLE-CASAMBI</b>				

<sup>1</sup> 50K series are available with 85+ CRI only   <sup>2</sup> 98+ CRI is available in 27K, 30K and 40K only   <sup>3</sup> DIMTR and LUT2W available in 120V only   <sup>4</sup> LUTFTB Available for luminaires up to 1500L   <sup>5</sup> 347V is available in only DIM10

PART NUMBER: **EPD-J5-WDM-30K-18K-900L-90-NSPD-DIM10-120V**

Series	Technology	Lumens	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-J5</b> <i>(Dim to Warm)</i>	<b>WDM-30K-18K</b>	<b>900L</b>	<b>90+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
	<b>WDM-30K-22K</b>	<b>1200L</b>		<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
	<b>WDM-27K-18K</b>	<b>1500L</b>		<b>ND</b>	<b>LUT2W<sup>1</sup></b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
		<b>2000L</b>		<b>MD</b>	<b>LUTFTB<sup>2</sup></b>		<b>INTG-EMG-LED-10W</b>	
				<b>MWD</b>	<b>DIMTR<sup>1</sup></b>		<b>INTG-EMG-LED-20W</b>	
			<b>WD</b>	<b>ELDO10.1</b>		<b>EMG-SDT-LED-10W</b>		
			<b>VWD</b>	<b>ELDODALI.1</b>				
				<b>ELDODMX.1</b>				
				<b>BLE-CASAMBI</b>				

<sup>1</sup> DIMTR and LUT2W available in 120V only   <sup>2</sup> LUTFTB Available for luminaires up to 1500L   <sup>3</sup> CP Available for luminaires up to 1500L

PART NUMBER: **EPD-J5-XIA-900L-27K-98-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-J5</b> <i>(Xicato Artist)</i>	<b>XIA</b>	<b>900L</b>	<b>27K</b>	<b>98+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
		<b>1200L</b>	<b>30K</b>		<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
		<b>1500L</b>	<b>30K-VIB</b>		<b>ND</b>	<b>LUT2W<sup>1</sup></b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
			<b>35K</b>		<b>MD</b>	<b>LUTFTB<sup>2</sup></b>	<b>347V<sup>3</sup></b>	<b>INTG-EMG-LED-10W</b>	
		<b>40K</b>		<b>MWD</b>	<b>ELDO10.1</b>		<b>INTG-EMG-LED-20W</b>		
			<b>WD</b>	<b>ELDODMX.1</b>		<b>EMG-SDT-LED-10W</b>			
			<b>VWD</b>	<b>ELDODALI.1</b>					
				<b>DIMTR<sup>1</sup></b>					
				<b>BLE-CASAMBI</b>					

<sup>1</sup> DIMTR and LUT2W available in 120V only   <sup>2</sup> LUTFTB Available for luminaires up to 1500L   <sup>3</sup> 347V is available in only DIM10

# 5"

# EPD-J5

## Edison Series



### Architectural LED Downlight - Retrofit

PART NUMBER: **EPD-J5-NSL-900L-27K-97-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-J5</b> <i>(Natural Spectrum)</i>	NSL	900L	27K	97+	NSPD	DIM10	120V	-	-
		1200L	30K		SPD	LUTH	277V	EMG-LED-10W	USA
		1500L	35K		ND	LUT2W <sup>1</sup>	MVOLT	EMG-LED-20W	
		2000L	40K		MD	LUTFTB <sup>2</sup>	347V <sup>3</sup>	INTG-EMG-LED-10W	
			50K		MWD	ELDO10.1		INTG-EMG-LED-20W	
	65K	WD	ELDODMX.1		EMG-SDT-LED-10W				
			VWD	ELDODALI.1					
				DIMTR <sup>1</sup>					
				BLE-CASAMBI					

<sup>1</sup> DIMTR and LUT2W available in 120V only   <sup>2</sup> LUTFTB Available for luminaires up to 1500L   <sup>3</sup> 347V is available in only DIM10

#### ORDER GUIDE

REFLECTOR TYPE				MOUNTING	COLOR					
Open Downlight EPD-5-501	Wall Wash EPD-5-507	Double Wall Wash EPD-5-577	Corner Wall Wash ?	Flanged 	ANODIZED FLANGED					
					Clear White CL-WH	Satin Haze White SHZ-WH	Black BK-BK			
					Clear Semi-Spec CL-SCH	White WH-WH	Satin Haze SHZ-SHZ			
								Clear Black CL-BK	Black White BK-WH	Wheat White WT-WH
Open Downlight EPD-5-TL-501	Wall Wash EPD-5-TL-507			Trimless 	ANODIZED TRIMLESS					
					White WH	Black BK	Clear CL	Satin Haze SHZ		



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES



