


Magic Wand

Track Mounted MR16 LED Luminaire

MW-MRE-O

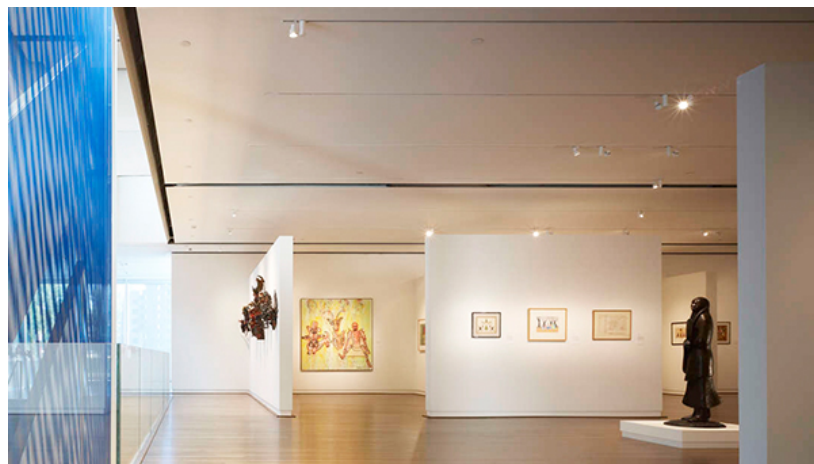

o

Applications

Magic Wand MR16 is an accent light designed for use with MR16 retrofit LED lamps. Magic Wand is a family of petite and discreet accent, spot, and wallwashers suitable for 10'-12' ceilings.

Features

- Signature Low Aperture Brightness: Expertly engineered optical system produces extremely low aperture brightness, desired by museums, galleries, and other architectural applications
- Concealed swivels provide 350° horizontal rotation and 0-90° tilt
- Magic Wand MR16 is only 4 3/4" tall, yet its pair of permanently tensioned swivels allows it to hit any spot and remain fixed at the desired angle
- To minimize glare, the lamp is deeply recessed in the lamp ring, and the conical specular black reflector reduces lamp brightness
- Flared socket caps prevent any backsplash of light to preserve a clean, quiet ceiling

Complete Family | Standard (MW-MRE-O)

SDCM | 2-Step MacAdam Ellipse

Finish | White, Black, Silver, RAL

Voltage | 120V

Lifetime | L70 at 50000 Hours

Weight (lbs) | 4

Listing | cSAus, c-UL-us



Magic Wand

Track Mounted MR16 LED Luminaire

MW-MRE-O

EXAMPLE: **MW-MRE-O-120V-WH**

Series	Voltage	Finish	Sleeves	Optical Accessories
MW-MRE-O	120V	WH	-	-
		BK	WSLV	OA-MW-MRE-O-FR
		SI	BSLV	OA-MW-MRE-O-SOL
		RAL		OA-MW-MRE-O-SL
				OA-MW-MRE-O-SL40X70
				OA-MW-MRE-O-BM
				OA-MW-MRE-O-LRS67
				OA-MW-MRE-O-LRS50

Note: All extra optical accessories, aperture assemblies, and optics can be ordered separately. Check [EPL Website](#) for ordering nomenclature.

Optical Purity

- Ridged pattern on the inner surface of the external reflector transmits the beam spread
- A beam smoother softens the light and comes standard; may be replaced with up to 2 optical accessories

Interchangeable Optical Accessories

If used with a specified lamp drawing 7.5 watts or less, fixture assembly accepts up to 1 optical accessory including spread lenses, a beam smoother and color filters.

Track Adaptor – Fully Concealed, Durable Locking

- Stainless steel clips lock fixture into our specially designed track systems. Two 'click' sounds indicate the fixture is secured into the track system
- Clips bite into aluminum, giving extremely durable ground connection
- Edison Price Lighting track systems are designed to completely conceal the adaptor for a clean profile
- Adaptors are shipped standard with all track fixtures. A Eutrac track adaptor can be used for mounting to Eutrac; 0-10V and DALI compatibility available. Contact factory for details

Seamless Installation

Fixtures may be configured to mount to any Edison Price Lighting recessed, suspended, surface-mounted track systems: [Sightline](#), [Highline](#), [Upline](#), [Autobus](#), [Eutrac](#), and [Unicep](#).

Anodized Construction

Heatsink is fabricated from extruded aluminum then undergoes a meticulous anodization process for a permanent and beautiful finish – increasing corrosion and heat resistance for long-lasting durability.

Carefully Applied, Low-VOC Finish

All Edison Price Lighting track fixtures are painted standard with low-VOC water-based paint – diminishing the release of toxic fumes – enhancing air quality and occupant health (unlike solvent-based paint).

Optical Accessories

- OA-MW-MRE-O-FR** (Diffuse Glass) - Widens the spread of the beam and removes striations; recommended to be specified with medium to wide optics
- OA-MW-MRE-O-SOL** (Solite Lens) - Stipple-patterned lens to appreciably diffuse the light
- OA-MW-MRE-O-SL** (Spread Lens) - Based on internal beam spread, can elongate the light source vertically or side-to-side
- OA-MW-MRE-O-SL40X70** (40° x 70° Spread Lens) - Delivers a rectangular beam recommended for illuminating wider artwork
- OA-MW-MRE-O-BM** (Beam Smoother) - Removes striations from the light source for a subtle wash of light
- OA-MW-MRE-O-LRS67** (67% Light Reduction Screen) - Reduces light by 67%, emitting 33% of total light; alternative to dimming
- OA-MW-MRE-O-LRS50** (50% Light Reduction Screen) - Reduces light by 50%, emitting 50% of total light; alternative to dimming
- OA-MW-MRE-O-DBL** (Daylight Blue) - Simulates daylight; ideal for museums, residential, & commercial
- OA-MW-MRE-O-PK** (Surprise Pink) - Complements skin tones; perfect for hospitality applications
- OA-MW-MRE-O-AMB** - Amber Color Filter
- OA-MW-MRE-O-BL** - Blue Color Filter
- OA-MW-MRE-O-GR** - Green Color Filter
- OA-MW-MRE-O-RD** - Red Color Filter
- OA-MW-MRE-O-RAL** (Rosco Custom Color) - Consult factory for a brilliant Rosco filter in any color. Click [here](#) to see more information on color filters selection

Driver

Fixture is individually fused and cULus-listed for mounting on Edison Price Lighting 120V track only. Fixture includes an integral electronic transformer.

Warranty

Five-year warranty not including providing extraordinary means of access, such as scaffolding or lifts, to service our products.

Listings

- cSAus
- c-UL-us

