


WWW.EPL.COM • 718.685.0700 • LONG ISLAND, NY

EDISON PRICE LIGHTING

Easy-Link

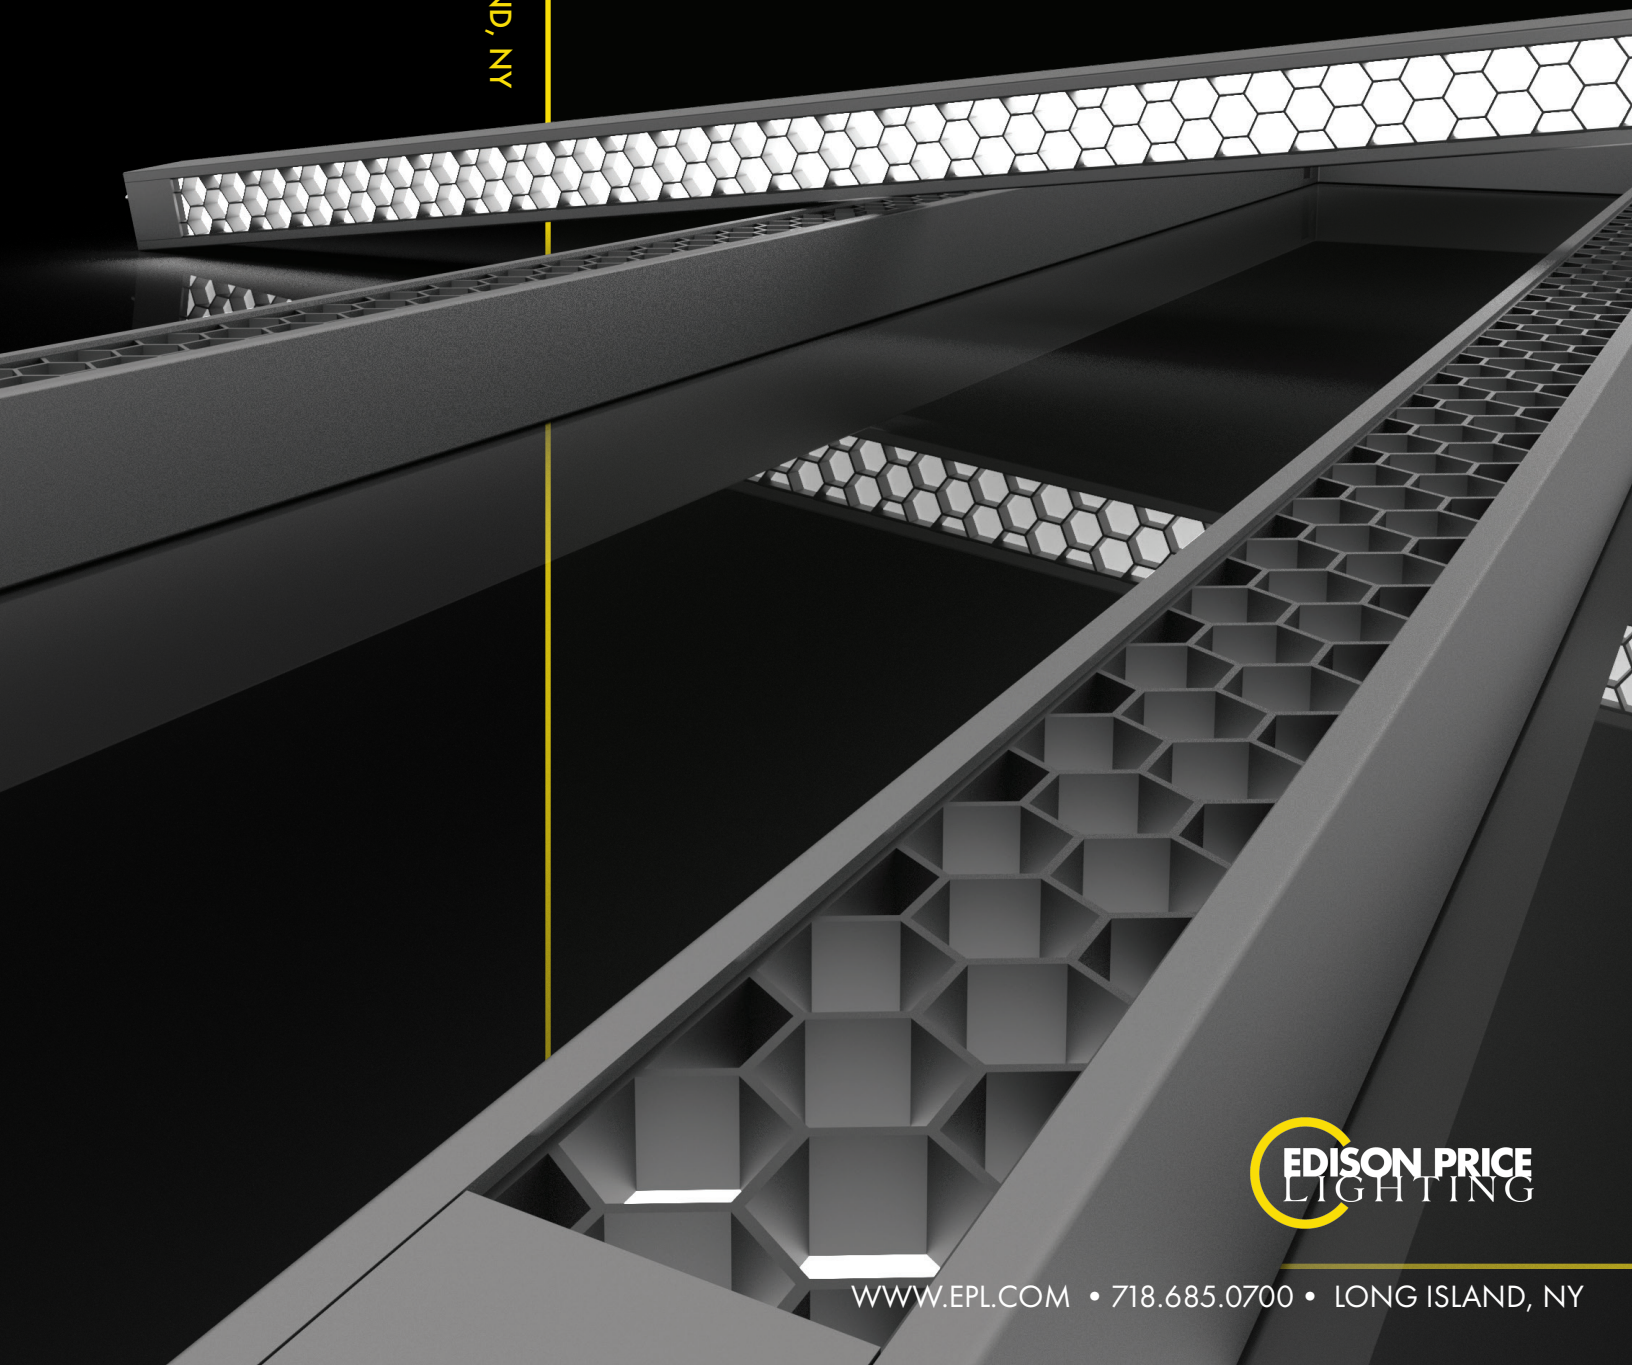

WWW.EPL.COM • 718.685.0700 • LONG ISLAND, NY

EASY-LINK

Modular luminaire with a twist.

A modular linear lighting system with a twist-on connector for ease of installation in any configuration. The socket rotates from downlight to uplight or any angle in-between. Linear sections can be assembled with in-line, T, X, or rectangular modules. Honeycomb or louvered baffles reduce glare potential while providing light output up to 8660 lumens in a 12' section. Easy-Link can be suspended, surface mounted on walls or ceilings or table/floor mounted with a weighted base.

Specification Data

LUMENS

1460 - 4 ft (18W)

2180 - 6 ft (27W)

2900 - 4 ft (36W)

4340 - 6 ft (54W)

5780 - 8 ft (72W)

8660 - 12 ft (108W)

CCT

3000K, 4000K

CRI

85

BEAM ANGLE

70°

MOUNTING


Surface, Suspended

FINISH


Gunmetal, Bronze

DIFFUSER

Honeycomb Grill, Louver,
Multi-Point, Diffuse

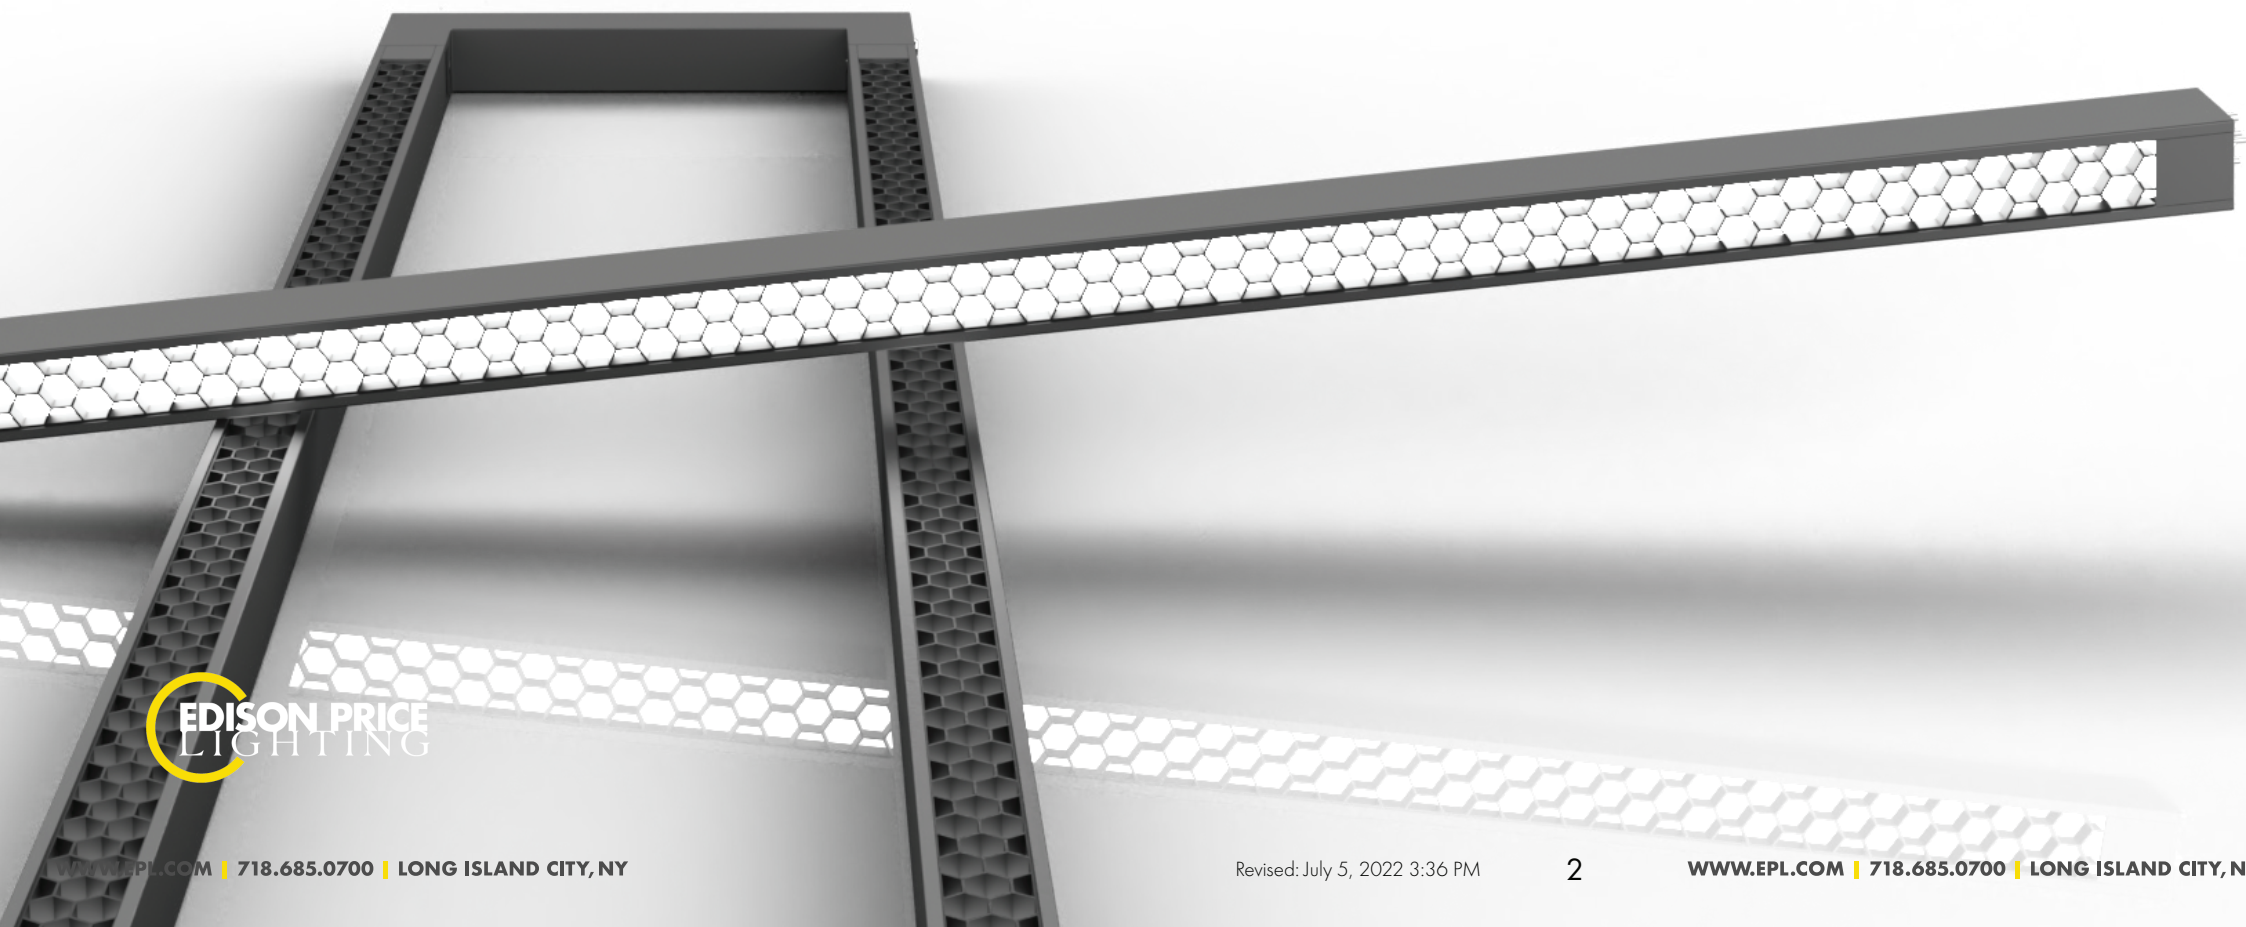

901A-S / HORIZONTAL LUMINAIRE

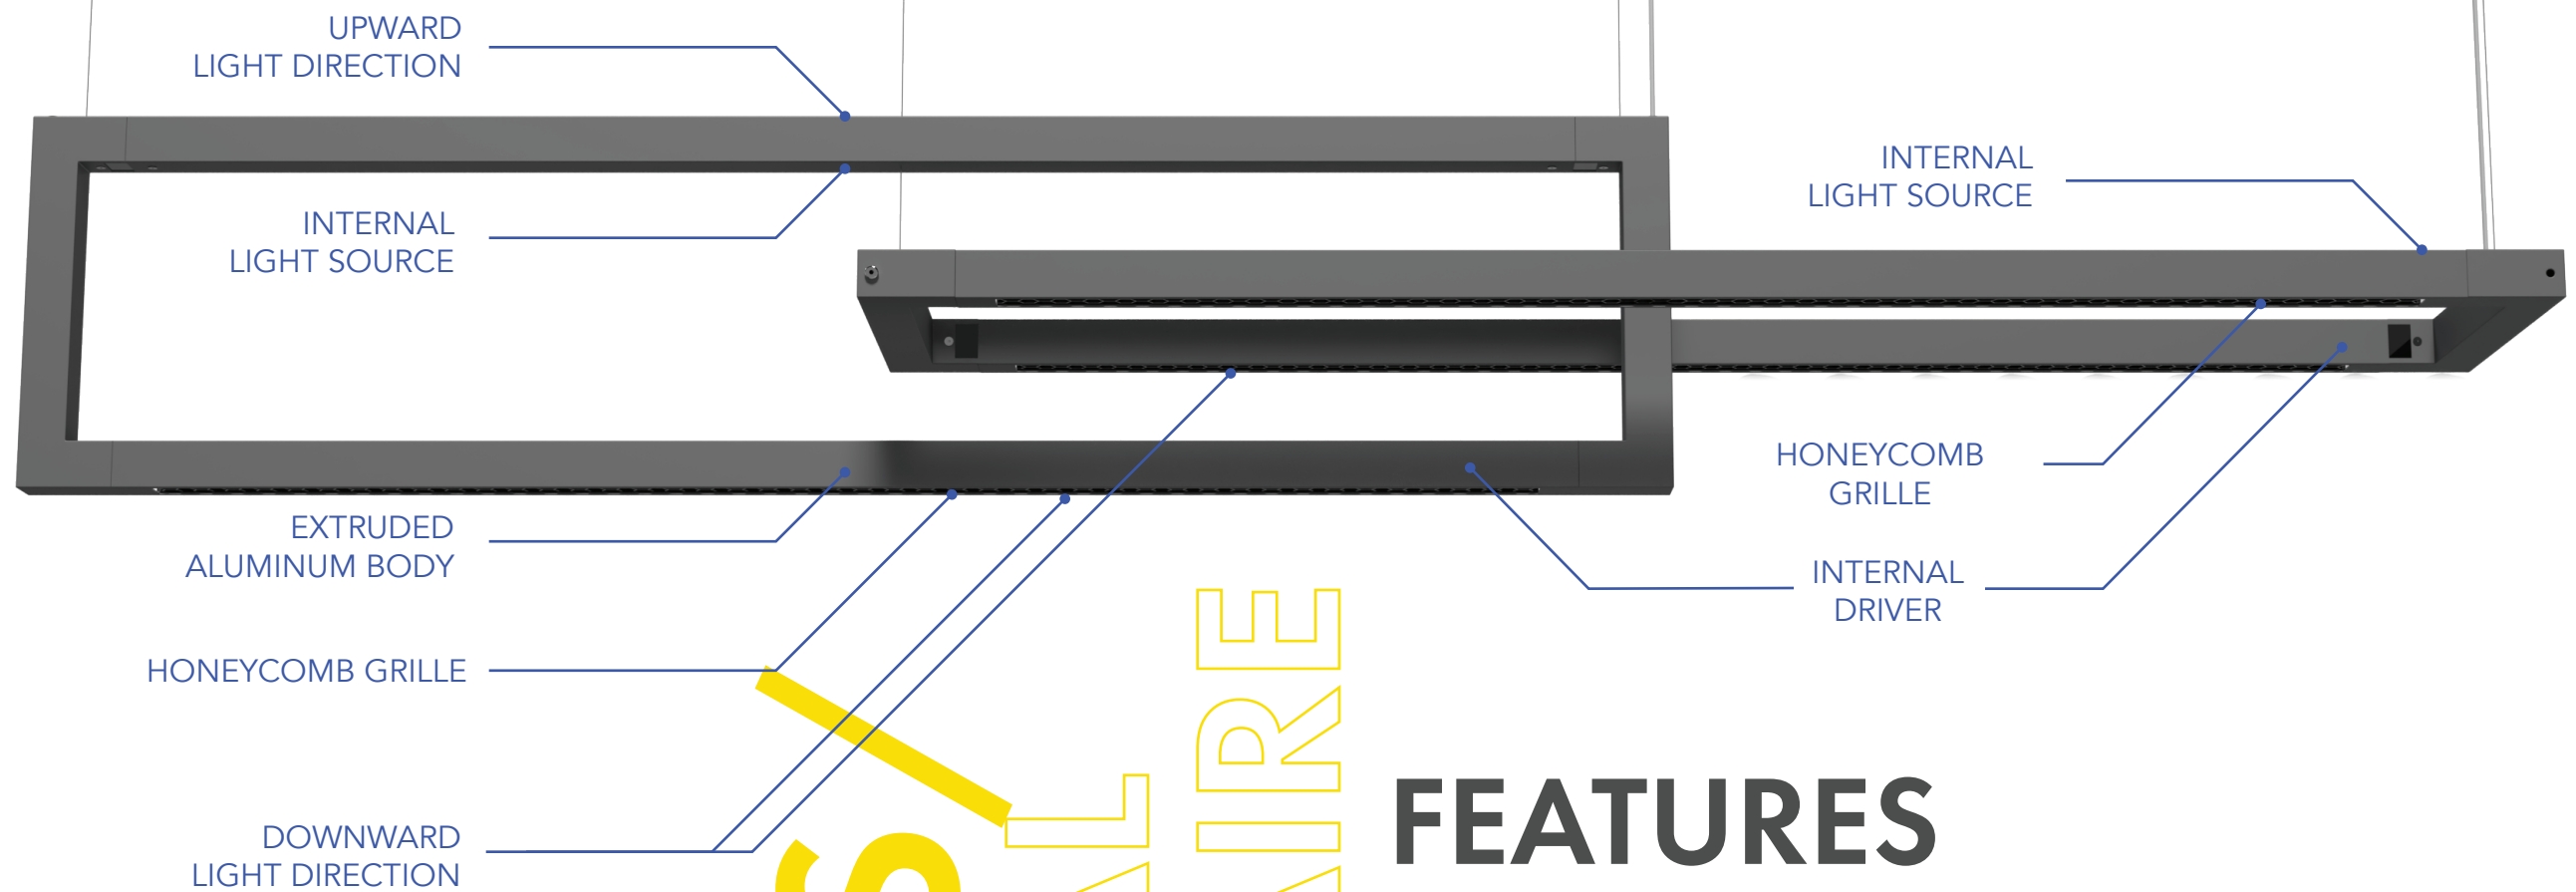


FEATURES

 Indoor	 General lighting	 High efficiency	 Clear color	 Long life	 Anti glare
 Accurate light distribution	 No flickering	 IP 20 Ingress Protection	 Protective grounding	 Fire protection	 Low lumen depreciation
 Tunable white	 Microwave sensor	 DALI	 Day-light control	 Wifi or BLE, Zigbee	 1-10V dimming



EASY-LINK

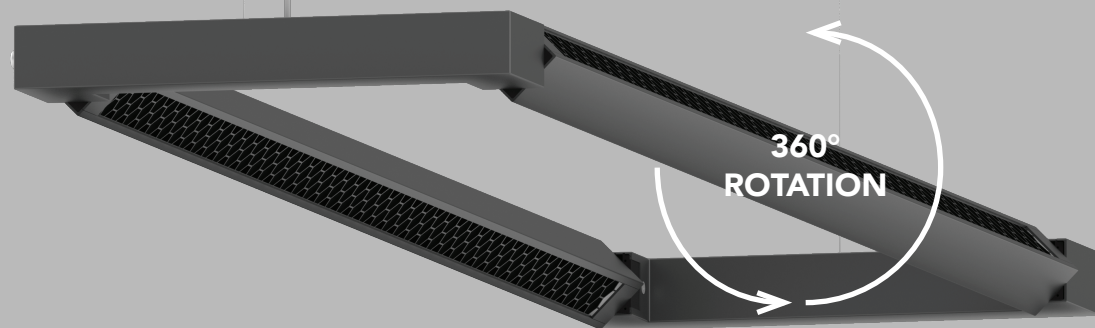

MULTI-DIRECTIONAL LIGHT CAN BE ADJUSTED TO ANY ANGLE IN 360° ROTATION

Easy-Link is a suspended linear luminaire with a housing made of extruded aluminum alloy with die-cast aluminum alloy endcaps, no visible screws, electrostatic thermo-painting finish, and flame-retardant polycarbonate honeycomb louver. It is UV and corrosion resistant in minimal dimensions for a beautiful appearance. The twist-lock sockets provide for ease of installation and multi-directional light control.



901-AC / SURFACE MOUNT LUMINAIRE



HORIZONTAL with HONEYCOMB BAFFLE



HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze





ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901A-SB1390H36W	55"x13"x1 1/2"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901A-SB1960H54W	77"x13"x1 1/2"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901A-SB1390H72W	55"x13"x1 1/2"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901A-SB2560H72W	101"x13"x1 1/2"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901A-SB1960H108W	77"x13"x1 1/2"	108W	3000K 4000K	8640 LM 8660 LM	70°	

HORIZONTAL with LOUVERED BAFFLE




HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze




ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901A-SB1390H36W	55"x13"x1 1/2"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901A-SB1960H54W	77"x13"x1 1/2"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901A-SB1390H72W	55"x13"x1 1/2"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901A-SB2560H72W	101"x13"x1 1/2"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901A-SB1960H108W	77"x13"x1 1/2"	108W	3000K 4000K	8640 LM 8660 LM	70°	

VERTICAL with HONEYCOMB BAFFLE

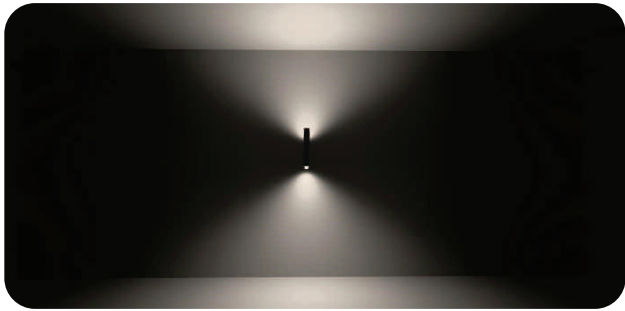


HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze




ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901B-SB1390H36W	55"x1 1/2"x13"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901B-SB1960H54W	77"x1 1/2"x13"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901B-SB1390H72W	55"x1 1/2"x13"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901B-SB2560H72W	101"x1 1/2"x13"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901B-SB1960H108W	77"x1 1/2"x13"	108W	3000K 4000K	8640 LM 8660 LM	70°	

VERTICAL with LOUVERED BAFFLE

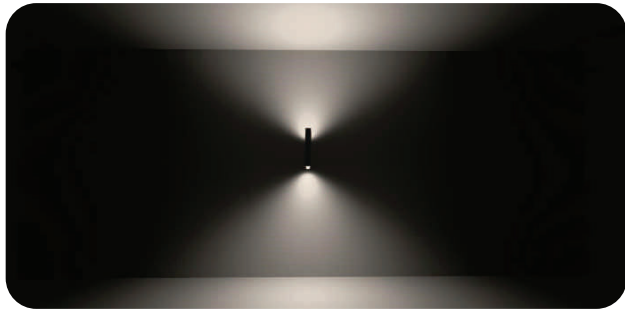


HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze




ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901B-SB1390H36W	55"x1 1/2"x13"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901B-SB1960H54W	77"x1 1/2"x13"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901B-SB1390H72W	55"x1 1/2"x13"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901B-SB2560H72W	101"x1 1/2"x13"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901B-SB1960H108W	77"x1 1/2"x13"	108W	3000K 4000K	8640 LM 8660 LM	70°	

901-S / SUSPENDED LUMINAIRE


FEATURES

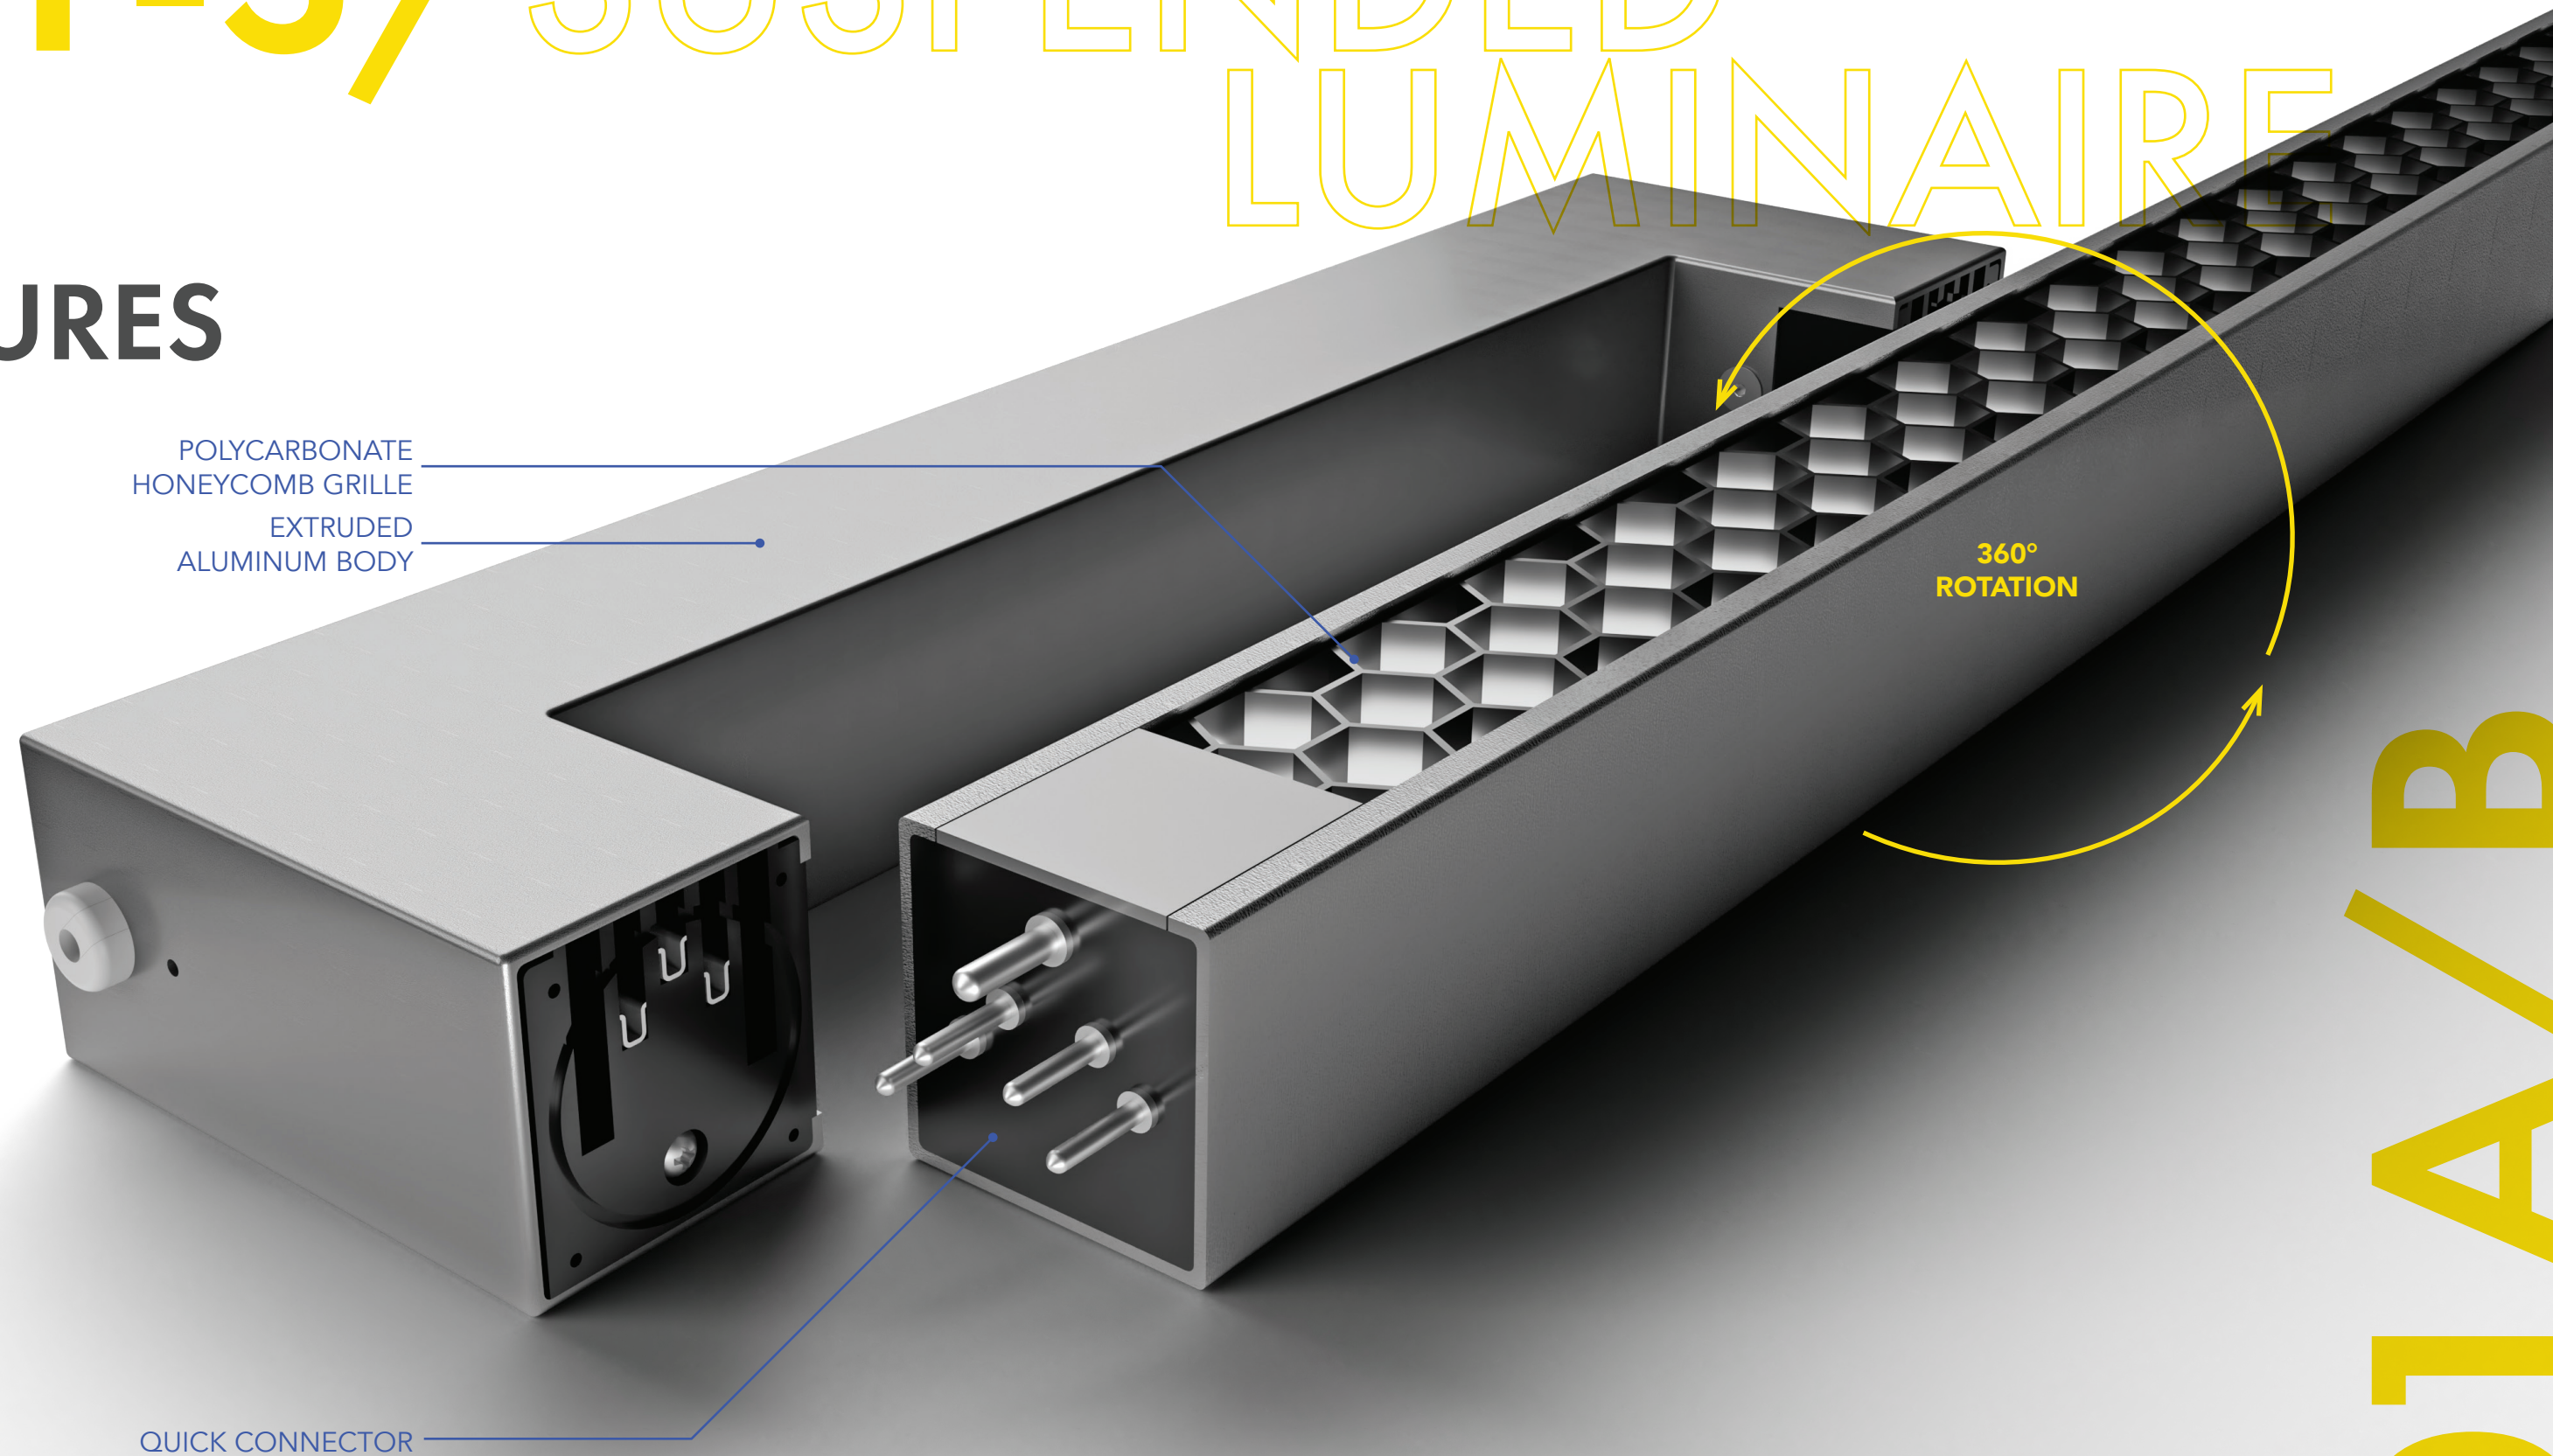

STANDARD SINGLE with HONEYCOMB BAFFLE

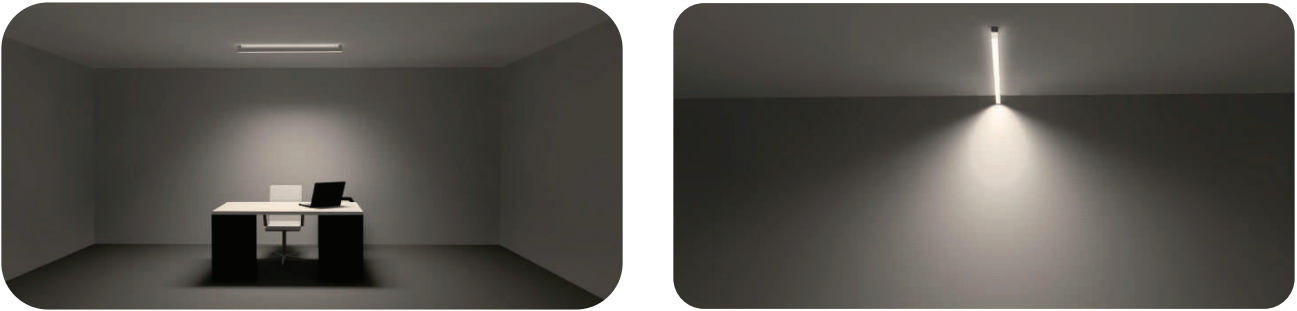


HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze

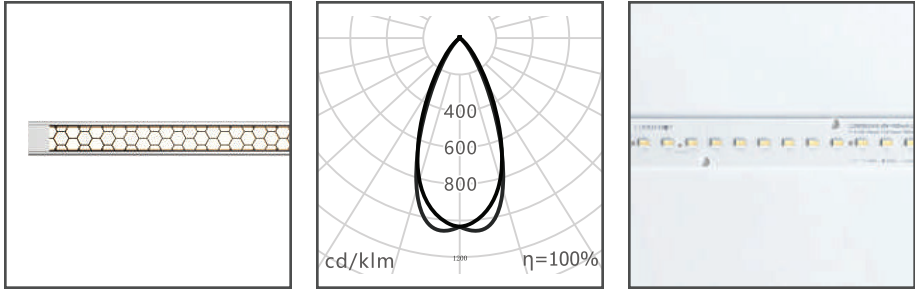


ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901-SB1200H18W	48"x1 1/2"x1 1/2"	18W	3000K 4000K	1440 LM 1460 LM	70°	
901-SB1776H27W	72"x1 1/2"x1 1/2"	27W	3000K 4000K	2160 LM 2180 LM	70°	
901-SB1200H36W	48"x1 1/2"x1 1/2"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901-SB1776H54W	72"x1 1/2"x1 1/2"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901-SB2352H72	96"x1 1/2"x1 1/2"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901-SB3504H108W	144"x1 1/2"x1 1/2"	108W	3000K 4000K	8640 LM 8660 LM	70°	

STANDARD SINGLE with LOUVERED BAFFLE

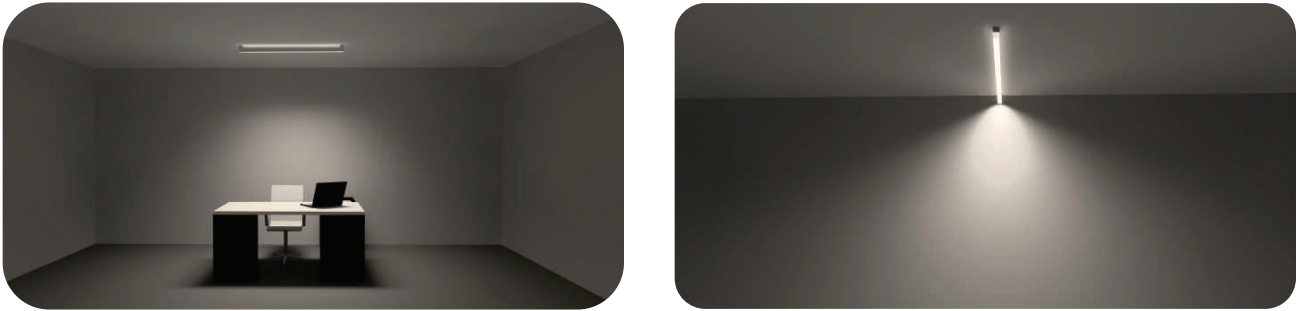

HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze


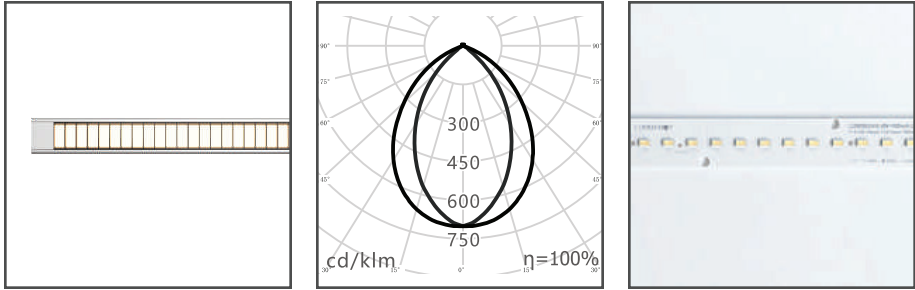


ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901-SB1200I18W	48"x1 1/2"x1 1/2"	18W	3000K 4000K	1440 LM 1460 LM	70°	
901-SB1776I27W	72"x1 1/2"x1 1/2"	27W	3000K 4000K	2160 LM 2180 LM	70°	
901-SB1200I36W	48"x1 1/2"x1 1/2"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901-SB1776I54W	72"x1 1/2"x1 1/2"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901-SB2352I72	96"x1 1/2"x1 1/2"	72W	3000K 4000K	5760 LM 5780 LM	70°	
901-SB3504I108W	144"x1 1/2"x1 1/2"	108W	3000K 4000K	8640 LM 8660 LM	70°	

901-C / SURFACE MOUNT LUMINAIRE




901-T / DESK READING LAMP

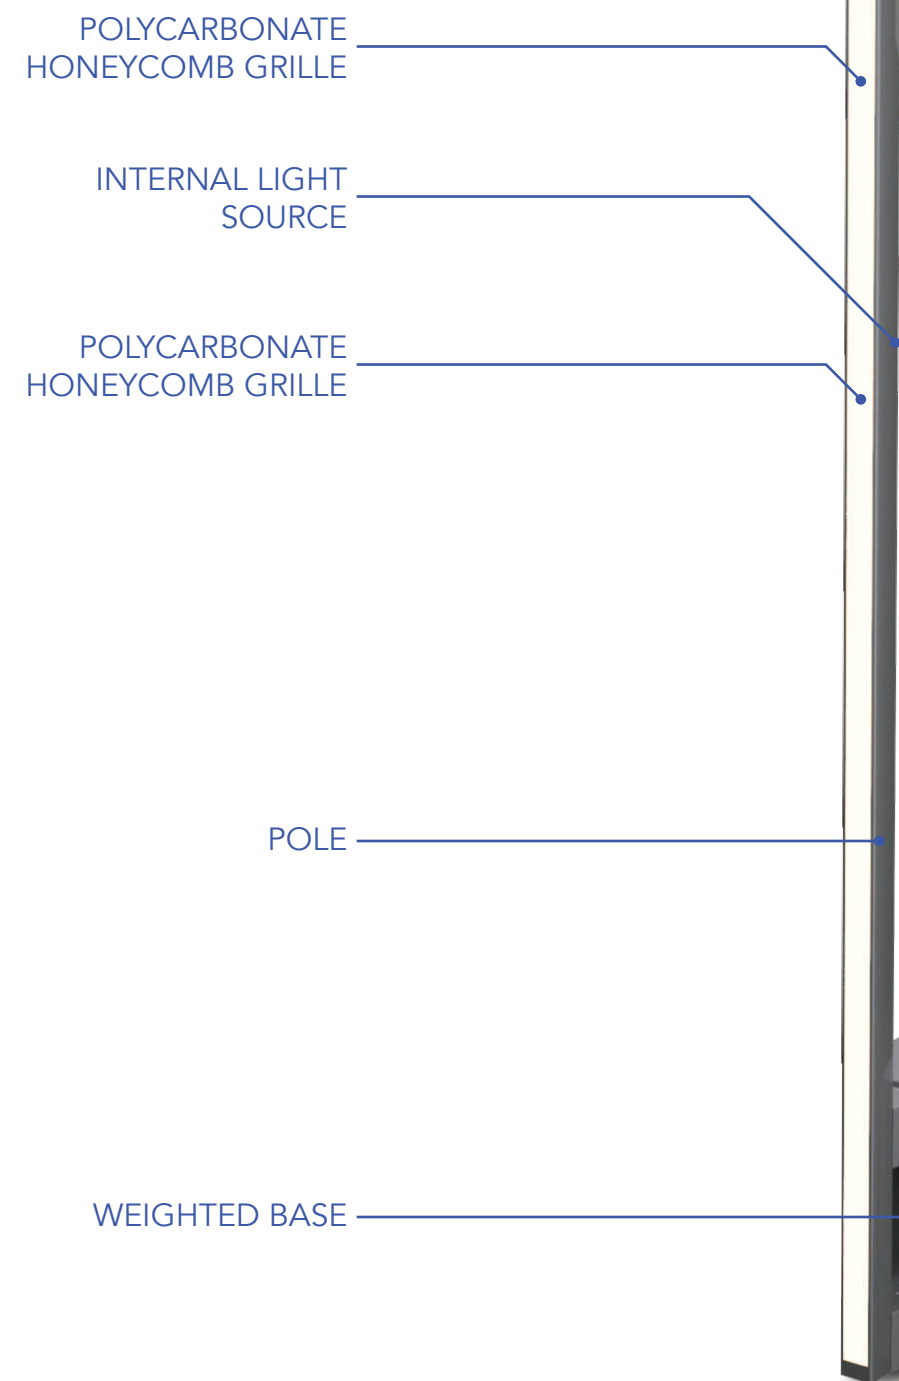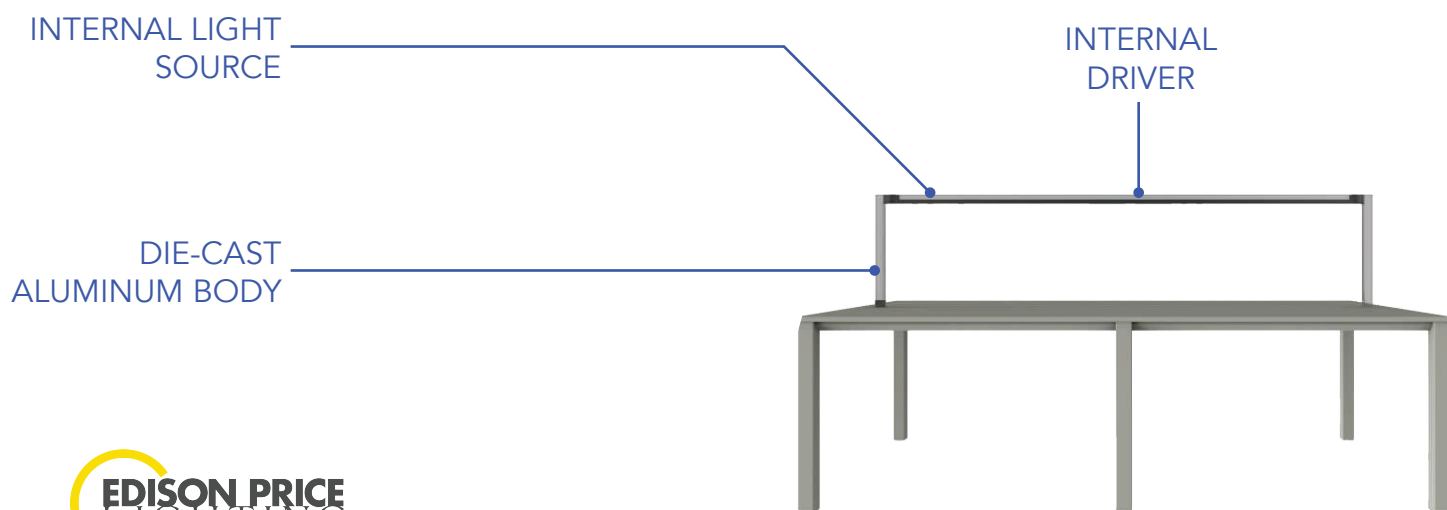

STANDARD SINGLE DESK READING LAMP




HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze

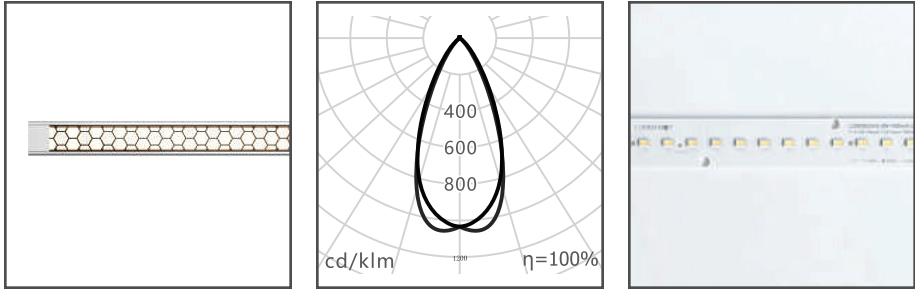


ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901- DB1390H36W	55"x1 ½"x13"	36W	3000K 4000K	2880 LM 2900 LM	70°	
901- DB1960H54W	77"x1 ½"x13"	54W	3000K 4000K	4320 LM 4340 LM	70°	
901- DB2560H72W	101"x1 ½"x13"	72W	3000K 4000K	5760 LM 5780 LM	70°	

STANDARD SINGLE FLOOR LAMP

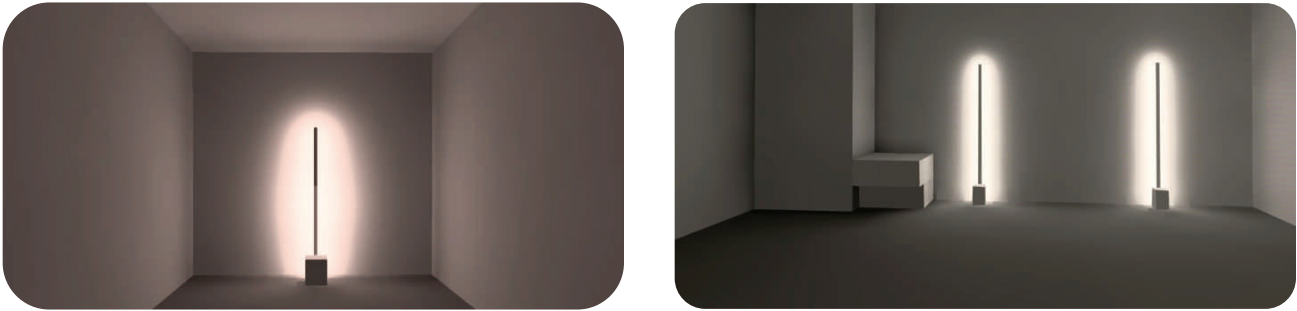

HOUSING	Aluminum Alloy
MOUNTING	Surface, Suspension
LIGHT SOURCE	SMD
CRI	85
EFFICACY	80 lm/W
VOLTAGE	120-277
UGR	16
FINISH	Gunmetal/Bronze

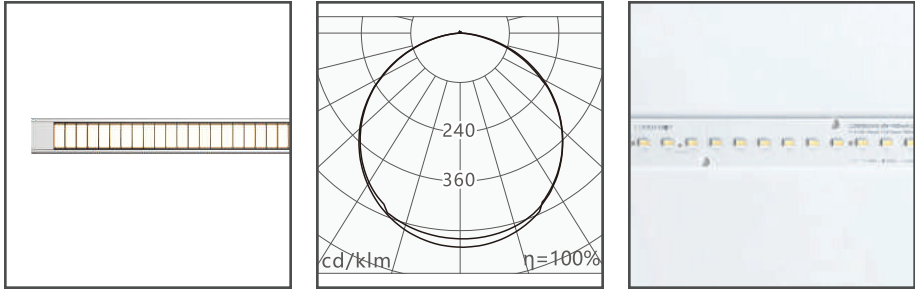

ITEM NO.	DIMENSIONS (LWH-nominal)	POWER	CCT	LUMENS	BEAM ANGLE	ILLUMIN. SCHEMATIC
901- LS1760T27W	9"x6"x70"	27W	3000K 4000K	2150 LM 2160 LM	110°	

WWW.EPL.COM • 718.685.0700 • LONG ISLAND, NY



WWW.EPL.COM • 718.685.0700 • LONG ISLAND, NY