

4"

BOLD-4-SHAL-IC

4" Shallow Downlight - Trim, Trimless & Millwork

Bold Series



APPLICATION & FEATURES

BOLD-4-SHAL-IC Downlight is a specification-grade architectural luminaire engineered for visual comfort, flexibility, and control. With field-changeable optics, tool-less trim interchangeability, and a range of precise beam distributions, BOLD-4-SHAL-IC delivers quiet ceilings and seamless integration into the architectural environment.

Available in three distinct housing options—flanged, trimless, and millwork—BOLD-4-SHAL-IC adapts to a wide range of ceiling conditions while maintaining a refined visual language. The system features 98 CRI with 1x2 Step MacAdam Ellipse color consistency for exceptional optical quality, and supports multiple dimming protocols down to 0.1% for maximum control and responsiveness.

Ideal for commercial, hospitality, retail, institutional, civic, cultural, corporate, academic, healthcare, luxury residential, gallery, and museum projects, BOLD-4-SHAL-IC supports elevated design intent without compromise.

As part of a complete family that includes wall wash and adjustable accent options, BOLD-4-SHAL-IC offers static and dynamic color technologies to meet the evolving demands of high-performance lighting design.

LUMENS	High Performance: 900L, 1200L and 1500L Warm Dimming: 900L and 1200L Xicato Artist: 900L
CCT & DYNAMIC PLATFORMS	High Performance: 27K, 30K, 35K, 40K and 50K Warm Dimming: 18K-30K, 27K-30K and 22K-30K Xicato Artist: 27K, 30K, 30K-VIB, 35K and 40K
CRI	High Performance: 90+ and 98+ Warm Dimming: 90+ Xicato Artist: 90+ and 98+
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTIONS	Very Narrow Spot (10°), Narrow Spot (15°), Spot (24°), Medium (36°) and Wide (60°)
DRIVER	High Performance: DIM10, DIMTR, LUTH, ELDO10-LOG, ELDO10.1-LIN, ELDODALI.1 and BLE-CASAMBI Warm Dimming: DIM10, DIMTR, LUTH, ELDO10-LOG, ELDO10.1-LIN, ELDODALI.1 and BLE-CASAMBI Xicato Artist: DIM10, DIMTR, LUTH, ELDO10-LOG, ELDO10.1-LIN, ELDODALI.1 and BLE-CASAMBI
TRIM OPTIONS	Downlight: Flanged, Trimless, Millwork Pinhole: Flanged, Trimless, Millwork
FINISH OPTIONS	Anodized: White (WH), Black (BK), Chrome (CL), Satin Haze (SHZ), Silver (SI), Bronze (BZ), Custom Color (RAL) Diecast: White (WH), Black (BK), Silver (SI), Bronze (BZ), Custom Color (RAL)
EMERGENCY	EMG-10, EMG-20, EMG-10-SDT, EMG-20-SDT and GTD
LIFETIME	LED is rated for >60,000 hours at 70% lumen maintenance
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-27



4"

BOLD-4-SHAL-IC

4" Shallow Downlight - Trim, Trimless & Millwork

Bold Series

High Performance: BOLD-4-SHAL-IC-900L-27K-90-10D-DIM10-120V

Series	Flange Options	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options	Optical Accessories
BOLD-4-SHAL-IC	-	900L	27K	90+	10D	DIM10	120V	-	-	-
	Flanged	1200L	30K	98+ 2	Very Narrow Spot (10°)	DIMTR 3	MVOLT	All emergency options require top access, remote emergency test switch included	RIF	SOFL
	TL	1500L 1	35K		15D	LUTH	347V 4		RIF Filter	Solite Frosted
	Trimless		40K		Narrow Spot (15°)	ELDO10-LOG			REM 5	SFL
	MW		50K		24D	ELDO10.1-LIN			Single Remote Dimming Driver	Soft Focus Lens
	Millwork				36D	ELDODALI.1			BABA	SPD
					Medium (36°)	BLE-CASAMBI		EMG-10	Made in America Compliance	Spread Linear Lens
					60D			EMG-20		UVL
					Wide (60°)			EMG-10-SDT		UV Lens
								EMG-20-SDT		HCL
								GTD	Controls	Honey Comb Louver
									See last page	PRS
										Prismatic Lens

Any fixture can take maximum 2 Optical Accessories 1 The highest lumen will not be compatible with any optical accessories 2 98+ CRI is available only on 27K, 30K and 40K 3 DIMTR is only available with 120V 4 347V is only available with DIM10 5 Remote mount Maximum distance from light fixture to remote power supply is 100' using 14 gauge wire, 50' using 16 gauge wire

Warm Dimming: BOLD-4-SHAL-IC-WDM-900L-18K-30K-90-15D-DIM10-120V

Series	Flange Options	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options	Optical Accessories
BOLD-4-SHAL-IC-WDM	-	900L	18K-30K	90+	15D	DIM10	120V	-	-	-
	Flanged	1200L 1	27K-30K		Narrow Spot (15°)	DIMTR 2	MVOLT	All emergency options require top access, remote emergency test switch included	RIF	SOFL
	TL		22K-30K		24D	LUTH	347V 3		RIF Filter	Solite Frosted
	Trimless				Spot (24°)	ELDO10-LOG			REM 4	SFL
	MW				36D	ELDO10.1-LIN			Single Remote Dimming Driver	Soft Focus Lens
	Millwork				Medium (36°)	ELDODALI.1			BABA	SPD
					60D	BLE-CASAMBI		EMG-10	Made in America Compliance	Spread Linear Lens
								EMG-20		UVL
								EMG-10-SDT		UV Lens
								EMG-20-SDT		HCL
								GTD		Honey Comb Louver
										PRS
										Prismatic Lens

Any fixture can take maximum 2 Optical Accessories 1 The highest lumen will not be compatible with any optical accessories 2 DIMTR is only available with 120V 3 347V is only available with DIM10 4 Remote mount Maximum distance from light fixture to remote power supply is 100' using 14 gauge wire, 50' using 16 gauge wire

4"

BOLD-4-SHAL-IC

4" Shallow Downlight - Trim, Trimless & Millwork

Bold Series

Xicato Artist: BOLD-4-SHAL-IC-XIA-900L-27K-90-10D-DIM10-120V

Series	Flange Options	Lumens	CCT	CRI	Optics	Driver	Voltage	Emergency	Options	Optical Accessories
BOLD-4-SHAL-IC-XIA	-	900L 1	27K	90+	10D	DIM10	120V	-	-	-
	Flanged		30K	98+ 2	Very Narrow Spot (10°)	DIMTR 3	MVOLT	All emergency options require top access, remote emergency test switch included	RIF	SOFL
	TL		30K-VIB			LUTH	347V 4		RIF Filter	Solite Frosted
	Trimless		35K		15D	ELDO10-LOG			REM 5	SFL
	MW		40K		Narrow Spot (15°)	ELDO10.1-LIN	EMG-10		Single Remote Dimming Driver	Soft Focus Lens
	Millwork				24D	ELDODALI.1	EMG-20	BABA	Made in America Compliance	SPD
					Spot (24°)	BLE-CASAMBI	EMG-10-SDT	Spread Linear Lens		UVL
					36D		EMG-20-SDT	UV Lens		HCL
					Medium (36°)		GTD	Honey Comb Louver		PRS
			60D						Prismatic Lens	
			Wide (60°)							

Any fixture can take maximum 2 Optical Accessories **1** The highest lumen will not be compatible with any optical accessories **2** 95+ CRI is not available on 50K **3** DIMTR is only available with 120V **4** 347V is only available with DIM10 **5** Remote mount Maximum distance from light fixture to remote power supply is 100' using 14 gauge wire, 50' using 16 gauge wire

4"








BOLD-4-SHAL-IC

4" Shallow Downlight - Trim, Trimless & Millwork

Bold Series





FLANGED REFLECTOR TYPE

Example: **B4R-402-A-F-WH-WH**

Trim Options		Trim Construction	Trim Flange Opt.	Reflector Finishes	Flange Finishes
 B4R-402 Open Downlight	 /media/trim/b4r-428.png (120x200 px) B4R-428 Solite Lens Downlight 	A Anodized DC Diecast	F Flanged	WH White BK Black SI Silver BZ Bronze CL 1 Chrome SHZ 1 Satin Haze RAL Custom Color (Consult Factory)	WH White BK Black SI Silver BZ Bronze CL 1 Chrome SHZ 1 Satin Haze RAL Custom Color (Consult Factory)
 B4R-414 Open Pinhole	 B4R-415 Solite Lens Pinhole 				
					

TRIMLESS/MILLWORK REFLECTOR TYPE

Example: **B4R-402-A-TL-WH-WH**

Trim Options		Trim Construction	Trim Flange Opt.	Reflector Finishes
		A Anodized DC Diecast	TL Trimless MW Millwork	WH White BK Black SI Silver BZ Bronze CL 1 Chrome SHZ 1 Satin Haze RAL Custom Color (Consult Factory)
B4R-402 Open Downlight	B4R-428 Solite Lens Downlight WET LOCATION			
				
B4R-414 Open Pinhole	B4R-415 Solite Lens Pinhole WET LOCATION			

1 Only available in anodized

DESCRIPTION

The BOLD-4-SHAL-IC Downlight is engineered for quiet ceilings and visual comfort, delivering precise, glare-controlled illumination exactly where it's needed. Its fixed optical system ensures consistent beam quality with tight cutoff, supporting low-glare, high-performance general lighting. For applications demanding an ultra-discreet aperture, BOLD-4-SHAL-IC offers a Pinhole trim option—minimizing visible source brightness while maintaining clean beam control. Ideal for high-end environments where visual precision and ceiling refinement are critical, BOLD-4-SHAL-IC helps lighting designers achieve subtle yet effective illumination.

LED LIGHT ENGINE

The BOLD platform features a patent-pending heat sink and LED module system that unlocks effortlessly from the housing with a simple twist—no tools required. Once released, the entire assembly drops below the ceiling line, allowing fast, easy replacement or upgrade of the LED light engine. This modular design also supports up to two optical accessories—including spread lenses, frosted lenses, color filters, plus a honeycomb louver—making it exceptionally versatile for post-installation tuning.

Exceptional Optical Quality: The precision-engineered light engine comes standard with 90+ CRI and maintains 1×2 Step MacAdam Ellipse consistency, ensuring accurate, uniform color across every luminaire.

Unlike traditional systems where all components are buried inside the housing and difficult to service, BOLD's intuitive below-ceiling access makes maintenance and adding additional accessories dramatically easier—setting a new standard for architectural lighting flexibility.

FIELD-CHANGEABLE OPTICS AND ACCESSORIES

Designed for adaptability, the BOLD platform enables efficient in-field customization. By unscrewing the cap on the heat sink, technicians can easily swap optics or add optical accessories—ensuring optimal light output and refined beam control without tools or reinstallation. This modular approach supports a wide array of field-changeable accessories, including spread lenses, frosted lenses, color filters, and honeycomb louvers, allowing for precise post-installation tuning.

A full range of beam options—from extremely narrow to wide—provides the flexibility to tailor light distribution with precision, whether emphasizing architectural elements or delivering broad ambient illumination. Field-changeable optics make it easy to respond to evolving design needs or spatial conditions directly on-site.

For added control, the LED module offers three fixed vertical positions within the housing. This design provides the flexibility to fine-tune both visual comfort and lighting performance to meet the specific demands of any space.

TRIM & COLLAR CONFIGURATIONS

Trimless: Designed for drywall or plaster ceilings, the die-cast spackle collar allows joint compound to be applied directly to the edge for a seamless, mudded-in finish. It mounts securely to the housing to prevent ceiling cracks during or after installation.

Millwork: For wood, tile, or stone ceilings, the millwork collar is finished to match the specified trim and ensures clean, stable integration with thicker or non-standard ceiling materials.

Flanged: Ideal for gypsum or ACT ceilings, flanged trims provide a clean, finished appearance with a subtle bezel that frames the aperture while maintaining optical performance and glare control.

COLLAR AND COLLAR EXTENDER OPTIONS

Each BOLD housing comes standard with a 1-inch collar. Optional collar extenders are available in 1.5-inch and 2-inch sizes to accommodate ceiling thicknesses up to 2". These extenders add minimal height and have a slight impact on light output. Consult factory for details and additional collar options.

TRIM CONSTRUCTION

With dual trim construction and an extensive library of finish options, BOLD trims empower lighting designers to achieve both technical precision and visual harmony in any space.

Anodized Aluminum: Designed for visual comfort, anodized trims recess the light source to achieve a 45-degree cutoff, enhancing glare control and supporting quiet ceilings in high-performance architectural environments. The electrochemical finish ensures long-term reflectance and material integrity.

Die-Cast: Die-cast trims provide sharp detailing, precise fit, and the ability to seamlessly blend into the ceiling plane with high-quality painted finishes. Ideal for minimalist spaces where integration and consistency are key.

DOWNLIGHT TRIM

Featuring a 45° visual cutoff angle to the source, this luminaire provides exceptional glare control and visual comfort while maintaining low-brightness apertures for a pleasant lighting experience. Available in a wide variety of colors and designs, it offers flexibility to suit diverse architectural needs. Available in Open Downlight, Lensed Downlight, and Pinhole Downlight configurations.

HOUSING

The housing is engineered for shallow plenum spaces, with a compact 2 1/2-inch height that provides a low-profile solution without compromising performance. Constructed from 18-gauge cold-rolled steel, the housing ensures exceptional mechanical strength, thermal efficiency, and long-term durability. The matte black powder-coated finish reduces internal reflections and enhances heat management, contributing to glare-free illumination.

Housing is IC-rated and can be installed in direct contact with insulation, ensuring proper thermal performance without requiring a minimum clearance from insulation materials. Integrated thermal protection safeguards against overheating, even in constrained ceiling spaces.

The 90°C-rated junction box features multiple 1/2" knockouts and accommodates 4-in/4-out through-branch wiring with snap-on access covers for efficient installation.

MOUNTING

Each housing includes heavy-duty, pre-installed bar hangers designed for flexible installation across a variety of ceiling types. Hangers extend to span joists up to 24" on center and can be repositioned along both the short and long axis of the housing. For narrower joist bays, hangers can be shortened to accommodate 12" spacing.

The system includes integral butterfly brackets fabricated from 18-gauge steel, providing vertical adjustment for accurate alignment with ceiling thickness. These brackets are compatible with 3/4" or 1-1/2" lathing channels, 1/2" EMT conduit, and optional C-channel bars for secure attachment in commercial grid ceilings.

Additional mounting slots and keyholes allow for versatile integration into T-bar ceilings or unconventional framing layouts.

DRIVER ACCESS & SERVICEABILITY

The BOLD platform includes a high-performance, constant-current electronic driver (0–10V dimming, 100%-1%) with integral thermal and surge protection compliant with IEEE C62.41. The driver is conveniently located within the housing and can be easily accessed from below the ceiling. Simply unlock the heat sink and LED module from the housing's holder with a simple twist. Once the heat sink holder is disengaged from the housing, rotate the heat sink holder 360 degrees and tilt it to a 45-degree angle to easily access the driver, allowing for quick service or replacement.

EMERGENCY OPTIONS/CONTROLS

10W or 20W emergency back-up battery systems are available with a remote mounted test switch. A self-diagnostic emergency option is also available. Other accessories and controls systems include modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications, and triac, dali and DMX protocols.

DIM TO WARM OPTION

Dims to Warm simulates traditional incandescent halogen lighting through dimming. When the luminaire dims to warm from 100% to .1%, it makes a smooth transition across the black body radiator while maintaining a constant CRI of 90+. Available in 30K-18K, 30K-22K or 27K-18K range.

XICATO ARTIST SERIES LED MODULE (XIA)

Powered by Xicato Artist Series®, which are tested to IES TM-30-15, with a color fidelity score (Rf) of 96 and a color gamut score (Rg) of 102, and color shift less than $du'v'$ of 0.003. Featuring cold phosphor technology, improving thermal management enhancing color consistency and delaying lumen depreciation.

NATURAL SPECTRUM (NSL)

Natural Spectrum LED option is designed for Human Centric lighting application. Natural Spectrum LEDs diminish blue light peak, similar spectral curve to sunlight, accurate rendering of colors and reduced scattered reflection and glare.

TUNABLE WHITE OPTION

Tunable White allows the luminaires to be color tuned via various controls. Create the perfect environment for the desired use of the space or mimic the natural color patterns throughout the day and stimulate circadian rhythm. Available in tuning range of 50K-27K (TWH-50K-27K), 65K-27K (TWH-65K-27K).

RGB+WHITE OPTION

Refine your space with Mood Master (RGB+W), which provides complete control over hue, color temperature, saturation, and dimming for design versatility. RGB + White technology has a color tuning range from 6500K to 1650K. RGB color range derived from the primary colors red, green and blue is used to create infinite color options in the RGB palette, adding colors together in varying amounts to create new ones. RGB + White technology enables users to adjust the color temperature, adding gradients of saturated colors. No longer restricted to white light LEDs, lighting designers and architects can manipulate a space with desired hues and shades, altering the color temperature of the room, creating the perfect environment. The use of RGB Tunable White technology in allows infinite possibilities for any application

DIMMING & DRIVER INFORMATION

DIM10 - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard

DIMTR - Triac & Electronic low voltage forward phase dimming. Available in 120V only

LUTH - Lutron LDE1 Hi-Lume Eco System with Soft Fade to Black 1% dimming

ELDO10-LOG - ELDO10-LOG with logarithmic dimming curve.

ELDO10.1-LIN - ELDO10-Linear with linear dimming curve.

ELDODALI.1 - EldoLED SoloDrive DALI-2. Dimming down to 0.1%

BLE-CASAMBI - Luminaires may be controlled, grouped, scheduled or placed in scenes, and or zones Via Casambi Bluetooth 4.0 App.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

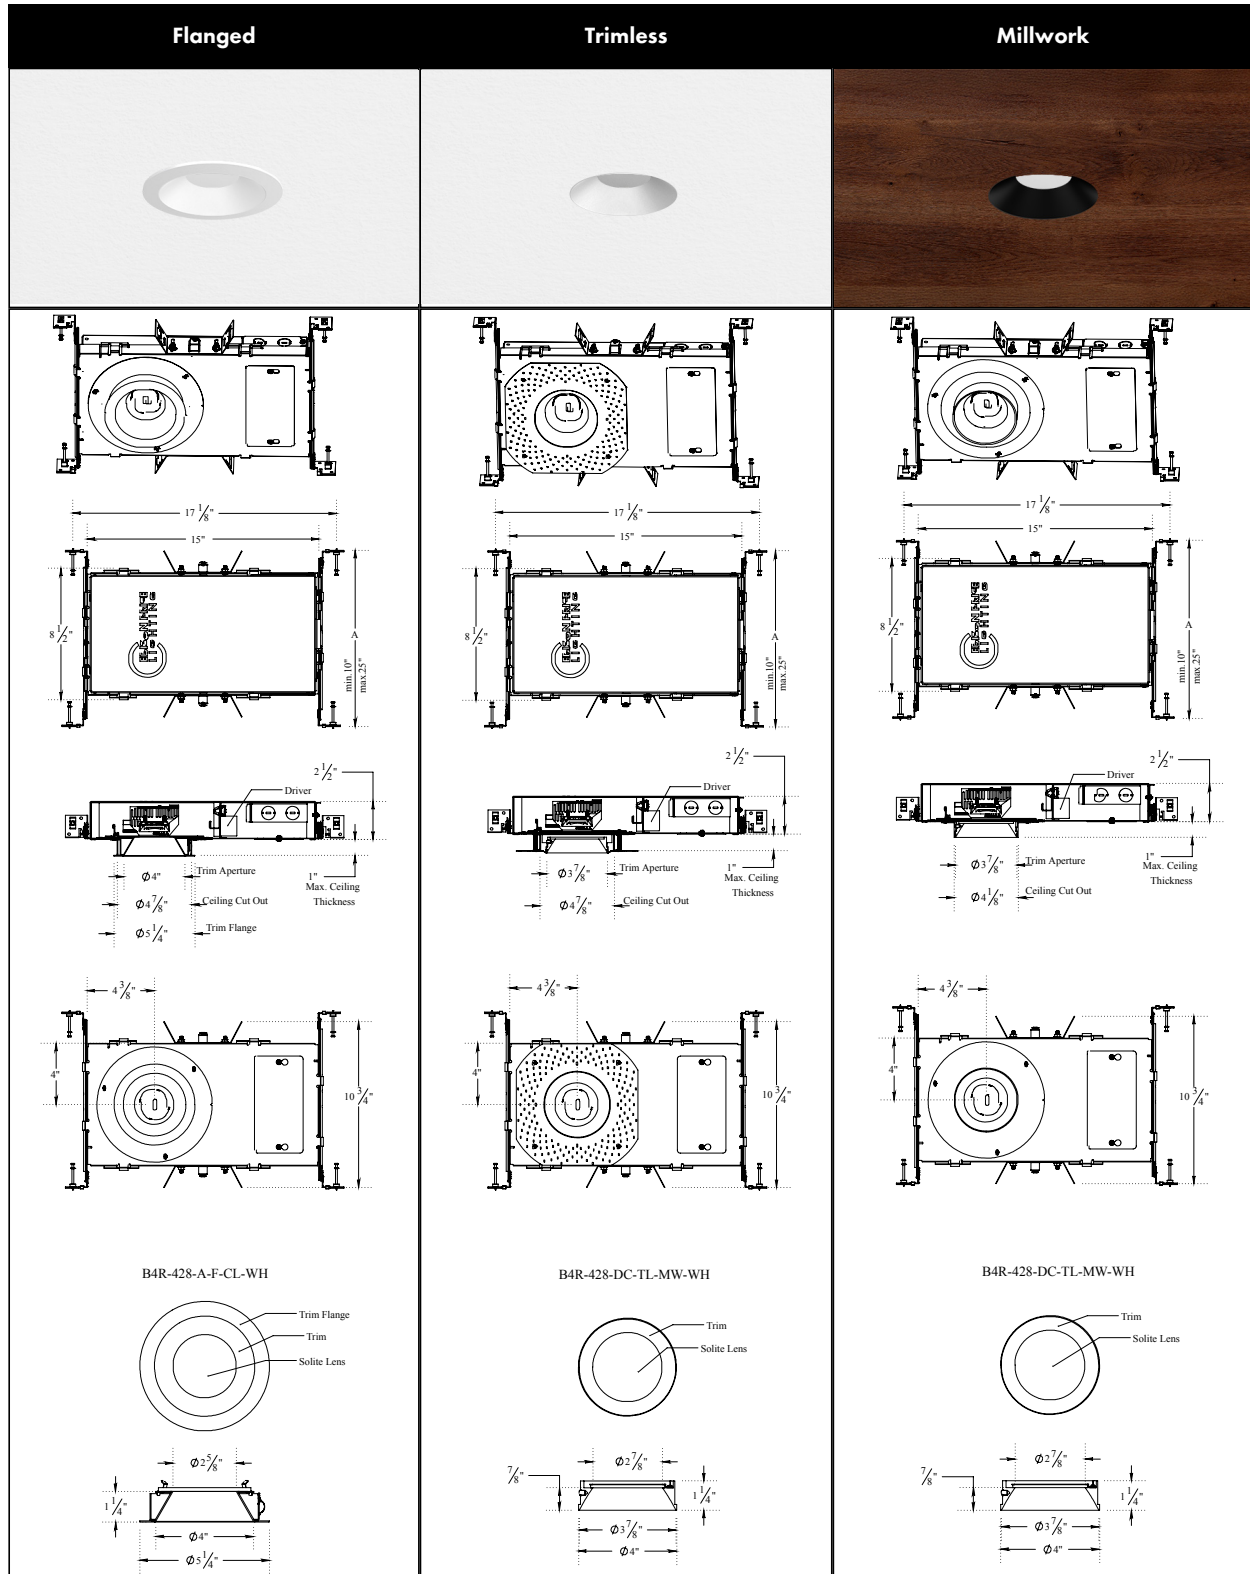
- c-UL-us: Listed for Wet Location when used with wet-location rated trims
- c-UL-us: Listed for Feed-Through Wiring
- Energy Star and California Title 24 compliant (JA8)
- Optional Black color trim is not Energy Star certified and will not meet the requirements
- 22K and 27K are not Energy Star listed and will not meet the requirements
- BABA Compliant for government procurement under FAR, DFARS, and DOT regulations.








4"

BOLD-4-SHAL-IC

4" Shallow Downlight - Trim, Trimless & Millwork

Bold Series



BRAND							
CONTROL UNIT	<input type="checkbox"/> FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminare is shipped Vive Enabled) 1 4 <input type="checkbox"/> FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminare is shipped Vive Enabled) <input type="checkbox"/> A-WN-D01-RF-WH Athena wireless node (RF only) (White) <input type="checkbox"/> A-WN-D01-OCC-WH Athena wireless node with sensor (White)	<input type="checkbox"/> CU-4E-FMH Fixture Mount Control Unit 1 5	<input type="checkbox"/> ZL027-NOW Intellect Power Control Module 1 6 <input type="checkbox"/> ZL027-DLE Intellect Power Control Module 1 6	<input type="checkbox"/> EN-WCM2-ZB-DR Wireless Control Module 1 7 <input type="checkbox"/> ENA-LC-ZB-BK-DR Wireless Area Lighting Control Module 1 7	<input type="checkbox"/> XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver 1 8	<input type="checkbox"/> LMFC-011 ON/OFF/0-10V dimming fixture controller 1 9 <input type="checkbox"/> FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack 1 9 <input type="checkbox"/> LMFS-601 Integrated Fixture Sensor & Controller	<input type="checkbox"/> NXFM-1R2D-O-UNV NX Fixture Module, Offset, 1 Relay, 2 0-10V Dimming Channels, 120-347VAC, Blue
INTEGRATED OCCUPANCY & DAYLIGHT SENSOR	<input type="checkbox"/> DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/Daylight Sensing 2	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Micro Sensor <input type="checkbox"/> SU-5S-H(IoT/CL/IL) Surface Mount Sensor 2 Must be Specified with CU-4E-FMH Control Unit	<input type="checkbox"/> ZL00J-TOW Intellect Intelligent Fixture Control System 2 <input type="checkbox"/> ZL00J-DOW Intellect Intelligent Fixture Control System 2	<input type="checkbox"/> EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor <input type="checkbox"/> ZBHACLM-DIM-ENC Connected Lighting Module DIM 2	<input type="checkbox"/> SNS 212 EasyAir Daylight and Occupancy sensor <input type="checkbox"/> SNS300 SNS300 for networks 2	<input type="checkbox"/> FD-301 Fixture integrated Daylight Dimming Sensor 2 <input type="checkbox"/> FS-205 Fixture integrated passive infrared occupancy sensor 2	<input type="checkbox"/> NXRM HubbNET™ Radio Module <input type="checkbox"/> NXSMP2-OMNI Integrated Fixture Sensor & Controller <input type="checkbox"/> NXSMP2-SMI NX Slide Mount Indoor Sensor Module
*WIRELESS OCCUPANCY SENSOR	<input type="checkbox"/> LRF2-OCR2B-P-WH Ceiling mount 360°, occupancy/vacancy sensor 3	N/A	N/A	<input type="checkbox"/> EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors 3	N/A	<input type="checkbox"/> LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor 3	<input type="checkbox"/> NXSMP2-SMI NX Slide Mount Indoor Sensor Module
*WIRELESS DAYLIGHT SENSOR	<input type="checkbox"/> LRF2-DCRB-WH Ceiling-mount daylight sensor 3	N/A	N/A	<input type="checkbox"/> EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors 3	N/A	<input type="checkbox"/> LMLS-400 Single zone switching and dimming digital photosensor 3	<input type="checkbox"/> LUXSTATLS Luxstat Light Sensor for Luxstat Control Modules, 3 to 6000 FC
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Micro Sensor <input type="checkbox"/> SU-5S-H (IoT/CL/IL) Surface Mount Sensor 3 Must be specified with CU-4E-FMH Control Unit	<input type="checkbox"/> ZL00J-TOW Intellect Intelligent Fixture Control System <input type="checkbox"/> ZL00J-DOW Intellect Intelligent Fixture Control System 3 Must be specified with ZL027-NOW and ZL00JDOW Control unit	<input type="checkbox"/> EN-CLMPIR-DD-ZB SensiLUM™ Wireless Integrated Sensor <input type="checkbox"/> ZBHACLM-DIM-ENC Connected Lighting Module DIM 3 Must be specified with EN-WCM2-ZB-DR or EN-ALC-ZB-BK-DR Control Unit	<input type="checkbox"/> SNS212-CMP SNS-212 for Grouping 3	N/A	<input type="checkbox"/> NXSMDT Indoor Ceiling Mount Sensor - OMNI
ACCESSORIES	N/A	<input type="checkbox"/> TMC-SU-5E Tile Mount Carrier <input type="checkbox"/> CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready <input type="checkbox"/> CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A	N/A

1- Luminare will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

2- Luminare will be shipped with Sensors installed on the luminare, allowing for individual luminare control. Luminaires will be ready to be integrated with designated control systems

3- Luminare will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

4- Luminare will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be ordered through Lutron

5- Luminare will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5S-H, Sensors

6- Luminare will be compatible with LEVITON Intellect APP & Keypad room controller

7- Luminare will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor

8- Luminare will be compatible with Philips field and wireless switch

9- Luminare will be compatible with DLM Room control system LMPB-100. Sensors must be ordered through Legrand.