

# 6"

## Architectural LED Downlight - Adjustable/Wall Wash

# EPD-6ADJ Edison Series



### Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

### Features

- Exceptional Optical Quality: Up to 98 CRI, 1×2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

<b>Lumens</b>	900, 1200, 1500, 2000, 3000, 4000, 6000
<b>CCT &amp; Dynamic Platforms</b>	22K, 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K or 27K-18K Xicato Artist: 27K, 30K, 35K, 40K, 30K-VIB Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K
<b>CRI</b>	90+ Standard, 98+
<b>Color Quality</b>	2 Step MacAdam Ellipse
<b>Distributions</b>	NSPD (15°), SPD (24°), ND (30°), MD (36°), MWD (52°), WD (60°), VWD (70°)
<b>Trim Options</b>	Adjustable
<b>Reflector Colors</b>	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), MB (Black), BZ (Bronze)
<b>Flange Colors</b>	Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black), BZ (Bronze)
<b>Emergency</b>	EMG-LED-10W, EMG-LED-20W, INTG-EMG-LED-10W, INTG-EMG-LED-20W, EMG-SDT-LED-10W
<b>Lifetime</b>	L70 at 102,000 Hours
<b>Photometric Tests</b>	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



# 6"

# EPD-6ADJ

## Edison Series

### Architectural LED Downlight - Adjustable/Wall Wash

PART NUMBER: **EPD-6ADJ-900L-22K-90-NSPD-DIM10-120V**

Series	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-6ADJ</b>	<b>900L</b>	<b>22K</b>	<b>90+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
	<b>1200L</b>	<b>27K</b>	<b>98+ 2</b>	<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
	<b>1500L</b>	<b>30K</b>		<b>ND</b>	<b>LUT2W 3</b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
	<b>2000L</b>	<b>35K</b>		<b>MD</b>	<b>LUTFTB 4</b>	<b>347V 5</b>	<b>INTG-EMG-LED-10W</b>	
	<b>3000L</b>	<b>40K</b>		<b>MWD</b>	<b>ELDO10.1</b>		<b>INTG-EMG-LED-20W</b>	
	<b>4000L</b>	<b>50K 1</b>		<b>WD</b>	<b>ELDODMX.1</b>		<b>EMG-SDT-LED-10W</b>	
	<b>6000L</b>			<b>VWD</b>	<b>ELDODALI.1</b> <b>DIMTR 3</b> <b>BLE-CASAMBI</b>			

1 50K series are available with 85+ CRI only 2 98+ CRI is available in 27K, 30K and 40K only 3 DIMTR and LUT2W available for luminaires up to 4000L in 120V only  
4 LUTFTB Available for luminaires up to 1500L 5 347V is available in only DIM10

PART NUMBER: **EPD-6ADJ-WDM-30K-18K-900L-90-NSPD-DIM10-120V**

Series	Technology	Lumens	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-6ADJ</b> <i>(Dim to Warm)</i>	<b>WDM-30K-18K</b>	<b>900L</b>	<b>90+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
	<b>WDM-30K-22K</b>	<b>1200L</b>		<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
	<b>WDM-27K-18K</b>	<b>1500L</b>		<b>ND</b>	<b>LUT2W 1</b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
		<b>2000L</b>		<b>MD</b>	<b>LUTFTB 2</b>		<b>INTG-EMG-LED-10W</b>	
		<b>3000L</b>		<b>MWD</b>	<b>DIMTR 1</b>		<b>INTG-EMG-LED-20W</b>	
		<b>4000L</b>		<b>WD</b>	<b>ELDO10.1</b>		<b>EMG-SDT-LED-10W</b>	
				<b>VWD</b>	<b>ELDODALI.1</b> <b>ELDODMX.1</b> <b>BLE-CASAMBI</b>			

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 CP Available for luminaires up to 1500L

PART NUMBER: **EPD-6ADJ-XIA-900L-27K-98-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-6ADJ</b> <i>(Xicato Artist)</i>	<b>XIA</b>	<b>900L</b>	<b>27K</b>	<b>98+</b>	<b>NSPD</b>	<b>DIM10</b>	<b>120V</b>	-	-
		<b>1200L</b>	<b>30K</b>		<b>SPD</b>	<b>LUTH</b>	<b>277V</b>	<b>EMG-LED-10W</b>	<b>USA</b>
		<b>1500L</b>	<b>30K-VIB</b>		<b>ND</b>	<b>LUT2W 1</b>	<b>MVOLT</b>	<b>EMG-LED-20W</b>	
		<b>2000L</b>	<b>35K</b>		<b>MD</b>	<b>LUTFTB 2</b>	<b>347V 3</b>	<b>INTG-EMG-LED-10W</b>	
		<b>3000L</b>	<b>40K</b>		<b>MWD</b>	<b>ELDO10.1</b>		<b>INTG-EMG-LED-20W</b>	
					<b>WD</b>	<b>ELDODMX.1</b>		<b>EMG-SDT-LED-10W</b>	
			<b>VWD</b>	<b>ELDODALI.1</b> <b>DIMTR 1</b> <b>BLE-CASAMBI</b>					

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 347V is available in only DIM10

# 6"

## Architectural LED Downlight - Adjustable/Wall Wash

# EPD-6ADJ Edison Series

PART NUMBER: **EPD-6ADJ-NSL-900L-27K-97-NSPD-DIM10-120V**

Series	Technology	Lumens	CCT	CRI	Optics	Drivers	Voltage	Emergency	Options
<b>EPD-6ADJ</b> <i>(Natural Spectrum)</i>	NSL	900L	27K	97+	NSPD	DIM10	120V	-	-
		1200L	30K		SPD	LUTH	277V	EMG-LED-10W	USA
		1500L	35K		ND	LUT2W <sup>1</sup>	MVOLT	EMG-LED-20W	
		2000L	40K		MD	LUTFTB <sup>2</sup>	347V <sup>3</sup>	INTG-EMG-LED-10W	
		3000L	50K		MWD	ELDO10.1		INTG-EMG-LED-20W	
			65K		WD	ELDODMX.1		EMG-SDT-LED-10W	
			VWD	ELDODALI.1					
					DIMTR <sup>1</sup>				
					BLE-CASAMBI				

<sup>1</sup> DIMTR and LUT2W available in 120V only   <sup>2</sup> LUTFTB Available for luminaires up to 1500L   <sup>3</sup> 347V is available in only DIM10

### ORDER GUIDE

REFLECTOR TYPE	MOUNTING	COLOR	
<b>Accent Adjustable</b> EPD-6ADJ-655 	<b>Flanged</b> 	<b>ANODIZED FLANGED</b> Clear White CL-WH    Satin Haze White SHZ-WH    Black BK-BK   	
		Clear Semi-Spec CL-SCH    White W-WH    Satin Haze SHZ-SHZ   	
		Bronze BZ-BZ    Black White BK-WH  	
		<b>ANODIZED TRIMLESS</b>	
		<b>Trimless</b> 	White WH    Black BK    Clear CL    Satin Haze SHZ    



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES

# 6"

## Architectural LED Downlight - Adjustable/Wall Wash

# EPD-6ADJ Edison Series

### Modifications Available

Consult factory for modification requests; orders may require shop drawing approval.

### Downlight

Our signature anodized reflector, spun to a reverse parabola design, achieves a 50° shielding angle and a 40° cut-off, which eliminates inter-reflections, and enhances low aperture brightness

### Adjustable

Has full adjustable aiming capability, allowing the double gimbal mechanism to rotate 360°, pivot 90°, and lock into place at any desired position.

### Optical Performance and Trim

Spun aluminum anodized single piece reflector. The optical system consists of 1) an upper reflector for a precise beam spread; 2) a solite soft focus lens to diffuse the light source for smooth, striation-free distribution; 3) and a patented lens to control the beam angle and provide a 40° visual cutoff. Available in a variety of beam angles. Integral heatsink comes preinstalled on the housing for maximum heat dissipation and locks together with the reflector to prevent zero light leakage for above the ceiling.

### Fully Servicable - Easy Installation & Upgrading

Housing maybe installed in ceilings of up to 1-1/2 inch thickness without the use of additional collars. Torsion springs on each side of the reflector hold snug to the ceiling, and allows for fast, easy installation into housing, and fast removal for easy access to the junction box from below the ceiling.

### Trim Design

Luminaire is designed for installation in sheetrock or T-Bar ceilings to achieve a flush trim detail.

- Trimless option has a perforated face. Installation includes the application of drywall compound over the luminaire's integral spackle screen to the rim of its integral plaster ring.

### Housing / Mounting

16-gauge steel, preassembled one-piece construction with integral 27" C-channel mounting brackets included. Mounting brackets may be adjusted up to 28" horizontally, and 2-3/4" vertically, and locking into place.

### Emergency Options/Controls

The test switch for the emergency battery can be installed on the side of the reflector (integral INTG-EMG option), or the test switch can be mounted remotely (EMG-LED option). Self Diagnostic emergency option available (EMG-SDT-LED-10W) Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W or INTG-EMG-LED-10W option & 2000L with EMG-LED-20W or INTG-EMG-LED-20W option in emergency mode. Other accessories and controls systems include modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

### Driver

120/277V 50/60Hz; 347V available. THD < 20%; power factor >.09. Thermally protected. Removal of the reflector provides complete accessibility to the junction box, driver and internal components from above and below the ceiling through the aperture.

### Dim to Warm Option

Dims to Warm simulates traditional incandescent halogen lighting through dimming. When the luminaire dims to warm from 100% to .1%, it makes a smooth transition across the black body radiator while maintaining a constant CRI of 90+. Available in 30K-18K, 30K-22K or 27K-18K range.

### Xicato Artist Series LED Module (XIA)

Powered by Xicato Artist Series®, which are tested to IES TM-30-15, with a color fidelity score (Rf) of 96 and a color gamut score (Rg) of 102, and color shift less than du'v' of 0.003. Featuring cold phosphor technology, improving thermal management enhancing color consistency and delaying lumen depreciation.

### Natural Spectrum (NSL)

Natural Spectrum LED option id designed for Human Centric lighting application. Natural Spectrum LEDs diminish blue light peak, similar spectral curve to sunlight, accurate rendering of colors and reduced scattered reflection and glare.

### Dimming & Driver Information

**DIM10** - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard

**LUTH** - Lutron LDE1 Hi-Lume Eco System with Soft Fade to Black 1% dimming

**LUT2W** - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase 120V only

**LUTFTB** - Lutron PEQO Hi-Lume Premier Eco System LED Driver with soft-on fade to black 0.1% dimming

**ELDO10.1** - EldoLED SoloDrive 0-10V. Dimming down to 0.1%

**ELDODMX.1** - EldoLED PowerDrive dimming down to 0.1%. Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

**ELDODALI.1** - EldoLED SoloDrive DALI-2. Dimming down to 0.1%

**DIMTR** - Triac & Electronic low voltage forward phase dimming. Available in 120V only

**BLE-CASAMBI** - Luminaires may be controlled, grouped, scheduled or placed in scenes, and or zones Via Cassambi Bluetooth 4.0 App."




# 6"

## Architectural LED Downlight - Adjustable/Wall Wash

# EPD-6ADJ Edison Series

Flanged

Trim Less

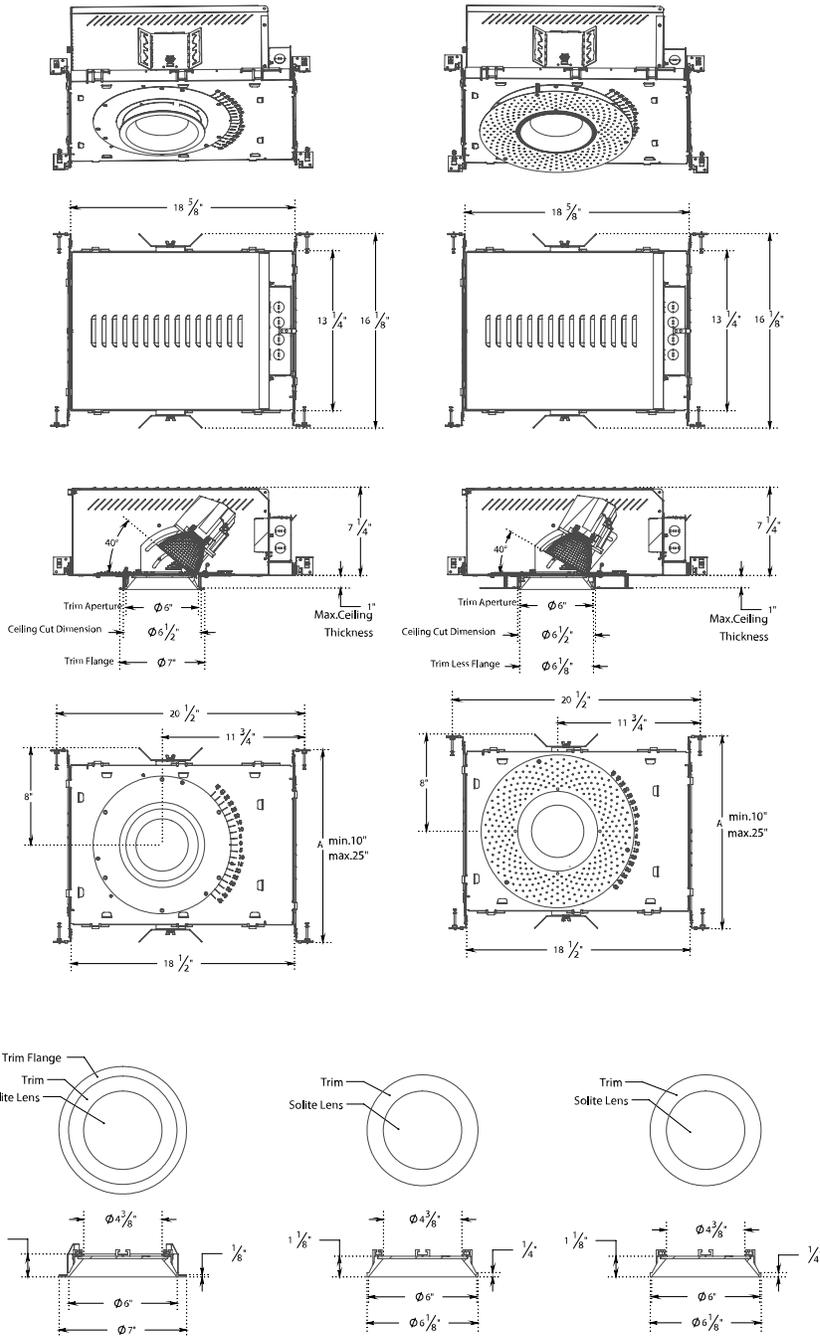

WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES