


6"

Architectural Square LED Downlight

EPD-6SQ Edison Series

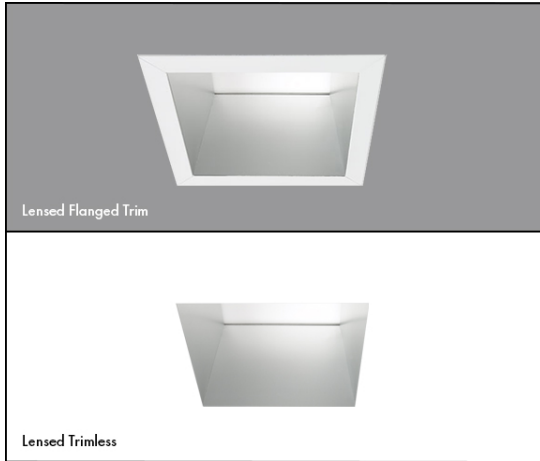

Application

A complete family of downlights, accent lights, wallwashers, double wallwashers, and corner wallwashers in multiple beam spreads and apertures designed for commercial, civic, museums, corporate, hospitality, academic, retail, medical, and houses of worship.

Features

- Exceptional Optical Quality: Up to 98 CRI, 1×2 Step MacAdam Ellipse.
- Shipped standard with a Solite Beam Smoother lens that removes striations from the light source.
- Available with a multitude of dimming protocols and control offerings.

| | |
|------------------------------------|---|
| Lumens | 900, 1200, 1500, 2000, 3000 |
| CCT & Dynamic Platforms | 22K, 27K, 30K, 35K, 40K, 50K Dims to Warm: 30K-18K, 30K-22K or 27K-18K Xicato Artist: 27K, 30K, 35K, 40K, 30K-VIB Natural Spectrum: 27K, 30K, 35K, 40K, 50K, 65K |
| CRI | 90+ Standard, 98+ |
| Color Quality | 2 Step MacAdam Ellipse |
| Distributions | MD |
| Trim Options | Downlight, Wall Wash, Wet Location |
| Reflector Colors | CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), MB (Black), BZ (Bronze) |
| Flange Colors | Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black), BZ (Bronze) |
| Emergency | EMG-LED-10W, EMG-LED-20W, INTG-EMG-LED-10W, INTG-EMG-LED-20W, EMG-SDT-LED-10W |
| Lifetime | L70 at 102,000 Hours |
| Photometric Tests | In Accordance with IES LM79-08, LM80 and TM-30, TM-21 |



6"

Architectural Square LED Downlight

EPD-6SQ Edison Series

PART NUMBER: **EPD-6SQ-900L-22K-90-MD-DIM10-120V**

| Series | Lumens | CCT | CRI | Optics | Drivers | Voltage | Emergency | Options |
|----------------|--------------|------------|-------------------|-----------|------------------------|---------------|-------------------------|------------|
| EPD-6SQ | 900L | 22K | 90+ | MD | DIM10 | 120V | - | - |
| | 1200L | 27K | 98+ 2 | | LUTH | 277V | EMG-LED-10W | USA |
| | 1500L | 30K | | | LUT2W 3 | MVOLT | EMG-LED-20W | |
| | 2000L | 35K | | | LUTFTB 4 | 347V 5 | INTG-EMG-LED-10W | |
| | 3000L | 40K | | | ELDO10.1 | | INTG-EMG-LED-20W | |
| | 50K 1 | | ELDODMX.1 | | EMG-SDT-LED-10W | | | |
| | | | ELDODALI.1 | | DIMTR 3 | | | |
| | | | | | BLE-CASAMBI | | | |

1 50K series are available with 85+ CRI only 2 98+ CRI is available in 27K, 30K and 40K only 3 DIMTR and LUT2W available in 120V only 4 LUTFTB Available for luminaires up to 1500L 5 347V is available in only DIM10

PART NUMBER: **EPD-6SQ-WDM-30K-18K-900L-90-MD-DIM10-120V**

| Series | Technology | Lumens | CRI | Optics | Drivers | Voltage | Emergency | Options |
|--|--------------------|--------------|-------------------|-----------|-------------------------|--------------|-------------------------|------------|
| EPD-6SQ <i>(Dim to Warm)</i> | WDM-30K-18K | 900L | 90+ | MD | DIM10 | 120V | - | - |
| | WDM-30K-22K | 1200L | | | LUTH | 277V | EMG-LED-10W | USA |
| | WDM-27K-18K | 1500L | | | LUT2W 1 | MVOLT | EMG-LED-20W | |
| | | 2000L | | | LUTFTB 2 | | INTG-EMG-LED-10W | |
| | | | DIMTR 1 | | INTG-EMG-LED-20W | | | |
| | | | ELDO10.1 | | EMG-SDT-LED-10W | | | |
| | | | ELDODALI.1 | | | | | |
| | | | ELDODMX.1 | | BLE-CASAMBI | | | |

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 CP Available for luminaires up to 1500L

PART NUMBER: **EPD-6SQ-XIA-900L-27K-98-MD-DIM10-120V**

| Series | Technology | Lumens | CCT | CRI | Optics | Drivers | Voltage | Emergency | Options |
|--|------------|-------------------|----------------|------------------------|-----------|-----------------|---------------|-------------------------|------------|
| EPD-6SQ <i>(Xicato Artist)</i> | XIA | 900L | 27K | 98+ | MD | DIM10 | 120V | - | - |
| | | 1200L | 30K | | | LUTH | 277V | EMG-LED-10W | USA |
| | | 1500L | 30K-VIB | | | LUT2W 1 | MVOLT | EMG-LED-20W | |
| | | | 35K | | | LUTFTB 2 | 347V 3 | INTG-EMG-LED-10W | |
| | | | 40K | | | ELDO10.1 | | INTG-EMG-LED-20W | |
| | | ELDODMX.1 | | EMG-SDT-LED-10W | | | | | |
| | | ELDODALI.1 | | DIMTR 1 | | | | | |
| | | | | BLE-CASAMBI | | | | | |

1 DIMTR and LUT2W available in 120V only 2 LUTFTB Available for luminaires up to 1500L 3 347V is available in only DIM10

6"

Architectural Square LED Downlight



















EPD-6SQ Edison Series

PART NUMBER: **EPD-6SQ-NSL-900L-27K-97-MD-DIM10-120V**

| Series | Technology | Lumens | CCT | CRI | Optics | Drivers | Voltage | Emergency | Options |
|---|------------|--------|-----------------|-----|--------|--------------------|-------------------|------------------|---------|
| EPD-6SQ <i>(Natural Spectrum)</i> | NSL | 900L | 27K | 97+ | MD | DIM10 | 120V | - | - |
| | | 1200L | 30K | | | | 277V | EMG-LED-10W | USA |
| | | 1500L | 35K | | | | MVOLT | EMG-LED-20W | |
| | | 2000L | 40K | | | | 347V ³ | INTG-EMG-LED-10W | |
| | | | 50K | | | | | INTG-EMG-LED-20W | |
| | 65K | | EMG-SDT-LED-10W | | | | | | |
| | | | | | | ELDO10.1 | | | |
| | | | | | | ELDODMX.1 | | | |
| | | | | | | ELDODALI.1 | | | |
| | | | | | | DIMTR ¹ | | | |
| | | | | | | BLE-CASAMBI | | | |

¹ DIMTR and LUT2W available in 120V only ² LUTFTB Available for luminaires up to 1500L ³ 347V is available in only DIM10

ORDER GUIDE

| REFLECTOR TYPE | MOUNTING | COLOR |
|--|--|---|
| <p>REFLECTOR TYPE</p> <p>Open Downlight EPD-6SQ-614</p>  <p>Wall Wash EPD-6SQ-607</p>  | <p>MOUNTING</p> <p>Flanged</p>  | <p>COLOR</p> <p>ANODIZED FLANGED</p> <p>Clear White CL-WH</p>  Satin Haze White SHZ-WH  Satin Haze SHZ-SHZ  Clear Semi-Spec CL-SCH  White WH-WH  Wheat White WT-WH  Black BK-BK  Black White BK-WH  |
| <p>REFLECTOR TYPE</p> <p>Downlight EPD-6SQ-TL-614</p>  Wall Wash EDP-6SQ-TL-607  | <p>MOUNTING</p> <p>Trimless</p>  | <p>COLOR</p> <p>ANODIZED TRIMLESS</p> <p>White WH</p>  Black BK  Clear CL  Satin Haze SHZ  |



WWW.EPL.COM | 718.685.0700 | NEW YORK / LOS ANGELES

6"

Architectural Square LED Downlight

EPD-6SQ

Edison Series

Modifications Available

Consult factory for modification requests; orders may require shop drawing approval.

Downlight

Our signature anodized reflector, spun to a reverse parabola design, achieves a 50° shielding angle and a 40° cut-off, which eliminates inter-reflections, and enhances low aperture brightness

Wall Wash

The optical assembly delivers uniform ceiling-to-floor wallwashing without creating any visible scallops. The optical assembly is specially designed to extend a beam in two directions for a uniform floor-to-ceiling and side-to-side wash of light.

Optical Performance and Trim

Spun aluminum anodized single piece reflector. The optical system consists of 1) an upper reflector for a precise beam spread; 2) a solite soft focus lens to diffuse the light source for smooth, striation-free distribution; 3) and a patented lens to control the beam angle and provide a 40° visual cutoff. Available in a variety of beam angles. Integral heatsink comes preinstalled on the housing for maximum heat dissipation and locks together with the reflector to prevent zero light leakage for above the ceiling.

Fully Servicable - Easy Installation & Upgrading

Housing maybe installed in ceilings of up to 1-1/2 inch thickness without the use of additional collars. Torsion springs on each side of the reflector hold snug to the ceiling, and allows for fast, easy installation into housing, and fast removal for easy access to the junction box from below the ceiling.

Trim Design

Luminaire is designed for installation in sheetrock or T-Bar ceilings to achieve a flush trim detail

Housing / Mounting

16-gauge steel adn can be installed with 3/4" or 1-1/2" lathing channel, 1/2" EMT, or with optional C-channel mounting bars ordered separately. Housing can acomodate ceilings from 1/2" upt tp 1 1/2" in thickness.

Emergency Options/Controls

The test switch for the emergency battery can be installed on the side of the reflector (integral INTG-EMG option), or the test switch can be mounted remotely (EMG-LED option). Self Diagnostic emergency option available (EMG-SDT-LED-10W) Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W or INTG-EMG-LED-10W option & 2000L with EMG-LED-20W or INTG-EMG-LED-20W option in emergency mode. Other accessories and controls systems include modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

Driver

120/277V 50/60Hz; 347V available. THD < 20%; power factor >.09. Thermally protected. Removal of the reflector provides complete accessibility to the junction box, driver and internal components from above and below the ceiling through the aperture.

Dim to Warm Option

Dims to Warm simulates traditional incandescent halogen lighting through dimming. When the luminaire dims to warm from 100% to .1%, it makes a smooth transition across the black body radiator while maintaining a constant CRI of 90+. Available in 30K-18K, 30K-22K or 27K-18K range.

Xicato Artistt Series LED Module (XIA)

Powered by Xicato Artist Series®, which are tested to IES TM-30-15, with a color fidelity score (Rf) of 96 and a color gamut score (Rg) of 102, and color shift less than du'v' of 0.003. Featuring cold phosphor technology, improving thermal management enhancing color consistency and delaying lumen depreciation.

Natural Spectrum (NSL)

Natural Spectrum LED option id designed for Human Centric lighting application. Natural Spectrum LEDs diminish blue light peak, similar spectral curve to sunlight, accurate rendering of colors and reduced scattered reflection and glare.

Dimming & Driver Information

DIM10 - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard

LUTH - Lutron LDE1 Hi-Lume Eco System with Soft Fade to Black 1% dimming

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase 120V only

LUTFTB - Lutron PEQO Hi-Lume Premier Eco System LED Driver with soft-on fade to black 0.1% dimming

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%

ELDODMX.1 - EldoLED PowerDrive dimming down to 0.1%. Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

ELDODALI.1 - EldoLED SoloDrive DALI-2. Dimming down to 0.1%

DIMTR - Triac & Electronic low voltage forwardp hase dimming. Available in 120V only

BLE-CASAMBI - Luminaires may be controlled, grouped, scheduled or placed in scenes , and or zones Via Cassambi Bluetooth 4.0 App."



