Date Product Code

Designer



MAXIMA 30SE O-OBM

surface mounted LED PAR30 accent light



- Fixture is designed for mounting on a 4" octagonal outlet box (by others).
- The optical assembly for Maxima 30SE O-OBM is a matte black crossbaffle which reduces spill light and controls lamp brightness. This assembly is fixed in place for precise aiming and easily removed as a unit for relamping.
- A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°. The swivel is permanently tensioned, allowing Maxima fixtures to remain fixed at any aiming angle.
- Maxima 30SE O-OBM fixtures accept one or two of of a number of Optical
 <u>Accessories</u> including spread lenses, a beam smoother and color filters.
- Maxima fixtures have seamless aluminum housings for lightweight durability and cast aluminum tops for heat dissipation. Standard finish is matte white; also available in black and Industrial Silver matte paint finishes.
- For more information, click here.

Lamps By Others

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories.

Dimming

For dimming compatibility consult the lamp manufacturer's website.

Maxima 30SE O-OBM is an accent light which has been checked for fit and initial operation with the following PAR-30 (short neck) retrofit LED lamps:

- Soraa PAR30S
- Green Creative PAR30 Short neck
- Cantact factory with additional lamp inquiries

PRODUCT CODE

OPTIONS

Specify by adding to the product code.

specify by adding to the product code.
a rocker type on/off switch on fixture top – SW
matte black housing finish
for on/off switch, consult factory BLK
Industrial Silver housing finish
for on/off switch, consult factory — SIL
custom color paint housing finish
identify color in specification

OPTICAL ACCESSORIES

Specify as separate line items. All are 3 ¾" (95mm) dia.

55° spread lens LENS/3.75 40° x 70° spread lens LENS/3.75-4070 prismatic lens (Solite) PLS/3.75 glass beam smoother CLR/3.75 UV filter UVF/3.75 color filters Daylight Blue DAY/3.75 Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	. , ,	
prismatic lens (Solite) PLS/3.75 glass beam smoother CLR/3.75 UV filter UVF/3.75 color filters Daylight Blue DAY/3.75 Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	55° spread lens	LENS/3.75
glass beam smoother CLR/3.75 UV filter UVF/3.75 color filters Daylight Blue DAY/3.75 Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	40° x 70° spread lens	LENS/3.75-4070
UV filter UVF/3.75 color filters Daylight Blue DAY/3.75 Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	prismatic lens (Solite)	PLS/3.75
color filters Daylight Blue DAY/3.75 Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	glass beam smoother	CLR/3.75
Daylight Blue DAY/3.75 Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	UV filter	UVF/3.75
Surprise Pink PNK/3.75 amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	color filters	
amber AMB/3.75 blue BLU/3.75 green GRN/3.75 red RED/3.75	Daylight Blue	DAY/3.75
blue BLU/3.75 green GRN/3.75 red RED/3.75	Surprise Pink	PNK/3.75
green	amber	AMB/3.75
red	blue	BLU/3.75
, and the second	green	GRN/3.75
1	red	RED/3.75
33% light reduction screenSCR33/3.75	33% light reduction screen	SCR33/3.75

50% light reduction screenSCR50/3.75




MAXIMA 30SE O-OBM



APPLICATIONS -

Fixtures are suitable for 120-volt electrical service and ${}^{\circ}\mathbb{U}_{U^{S}}$ listed for mounting on a standard 4" octagonal outlet box (by others).

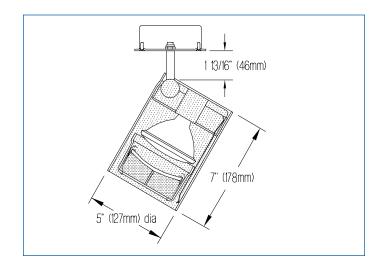

For current lamp performance data, consult lamp manufacturer's website.