

PROJECT:

TYPE:


DATE:

PRODUCT CODE:

ESSENCE TRACK

ARCHITECTURAL TRACK HEAD

ESS-366

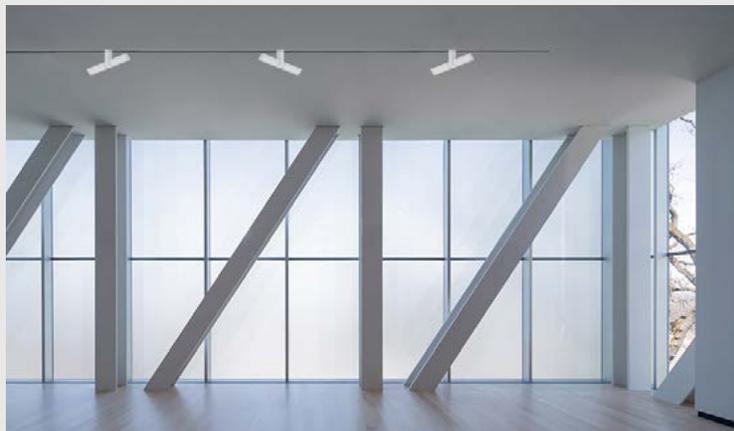

Description:

Applications

This versatile LED track light is ideal for accentuating displays and creating focused illumination in retail, galleries, museums, hospitality, supermarkets, and commercial spaces, offering adjustable positioning and a range of color temperatures to suit any environment.

Features

- Compact LED track light providing optimal lumen output
- Precise aiming for accent, task, or general illumination
- Seamlessly integrates into any design
- Track heads adjustability: 360° horizontal/ 180° vertical
- Compatible with 1-circuit and 2-circuit tracks
- Friction-based locking system for secure adjustments
- Allows precise positioning of the light as needed
- Available in a range of color temperatures, from cool to warm tones

Wattage:

Nominal Lumens	Delivered Lumens	Wattage
2500	2413	37.7W

Based on 3000K, 90+ CRI. Actual wattage may vary +/-5%

Specifications:

Lumens 2500

CCT 30K

CRI 90+

Color Quality 2 Step Mac Adam Ellipse

Optics VWD (Very Wide Distribution 98°)

Finish White, Black, Custom Color (RAL)

Aiming 360° (horizontal), 180° (vertically)

Dimming Flicker Free 10% Dimming TRIAC forward-phase or leading-edge 120V.

Lifetime L70 at 50,000 Hours

Listings In Accordance with IES LM79-08, LM-08 and TM-30, TM-21



PART NUMBER: **ESS-366-2500L-30K-90-98D-DIMTR-120V-WH**

Series	Lumens	CCT	CRI	Optics	Drivers	Voltage	Finish
ESS-366	2500L	30K	90+	98D <small>(98°)</small>	DIMTR	120V	WH <small>(White)</small> BK <small>(Black)</small> CC <small>(RAL)</small>

Optics

A polycarbonate optical refractor ensures accurate beam control and uniform light distribution, available in various lumen options.

Construction

Each track head features CoolLED Advanced Thermodynamic Design, with a body made of extruded aluminum and a custom die-cast concealed heat sink. This thermal management system is specifically engineered for extended lifespan and durability.

Finish

Available in white, black and custom RAL Color finishes.

Accessories

Track heads can support 1 to 3 accessories. Please contact the factory for standard or custom options.

Optics

A polycarbonate optical refractor ensures accurate beam control and uniform light distribution, available in various lumen options.

Construction

Each track head features CoolLED Advanced Thermodynamic Design, with a body made of extruded aluminum and a custom die-cast concealed heat sink. This thermal management system is specifically engineered for extended lifespan and durability.

Finish

Available in white, black and custom RAL Color finishes.

Accessories

Track heads can support 1 to 3 accessories. Please contact the factory for standard or custom options.

Track Compatibility

Track heads are standard and compatible with Mono-point, 1-Circuit, and 2-Circuit type H tracks. Type J (Juno) adapter option available upon request.

Please consult the factory for compatibility with 2-Circuit, 2-Neutral 120V Track, 2-Circuit, 2-Neutral 277V Track, 3-Circuit 1-Neutral Track, and DALI System Track.


Dimming and Driver

DIMTR

Electronic constant current LED driver compatible with TRIAC forward-phase (leading-edge) dimming, available in 120V. Standard dimming down to 1%. The LED driver operates at 50 to 60Hz with a 120V input, maintains less than 20% THD, and achieves a power factor between 90% and 100%. It is thermally protected for enhanced safety. Please consult the factory for 277V or 0-10V dimming options.

Warranty

Five-year warranty for parts and components. (Labor not included)

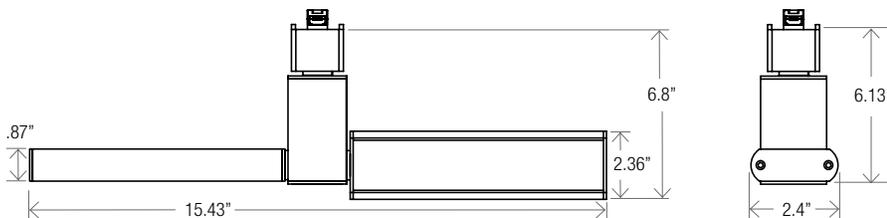

ESSENCE TRACK

ARCHITECTURAL TRACK HEAD


ESS-366

ESS-366-2500L-30K-90-98D-DIMTR-120V-WH

TEST NO: **EPL101897**

INPUT WATTS: 37.7 LUMENS: 2413 CRI: 90 EFFICACY: 64 CCT: 3000K SPACING CRITERIA: 1.26

Candle Power Distribution (Candelas)

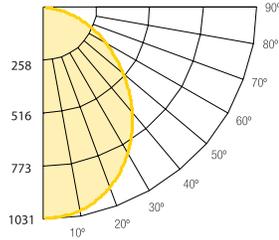

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	367.70	15.20	15.20
0-30	761.88	31.60	31.60
0-40	1209.25	50.10	50.10
0-60	1988.32	82.40	82.40
0-80	2370.98	98.30	98.30
0-90	2412.83	100.00	100.00

Luminance (Average candela/ft²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	15497	16468	17377
55	13547	14432	15422
65	11573	12512	13514
75	10058	9874	10857
85	10398	9758	4649

Lumens Per Zone

Zone	Lumens
0-10	96.79
10-20	270.91
20-30	394.18
30-40	447.37
40-50	426.50
50-60	352.57
60-70	248.17
70-80	134.48
80-90	41.86

Candela Tabulation

Zone	0	10	20	30	40	50	60	70	80	90
0	1029.41									
5	1020.16									
15	948.69									
25	836.82									
35	688.89									
45	522.24									
55	370.31									
65	233.10									
75	124.06									
85	43.19									
90	2.76									

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC		80%				70%				50%				30%				10%				0%	
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100		
1		109	105	101	97	107	103	99	96	98	95	93	94	92	90	91	89	87	87	87	87	85		
2		100	92	86	80	97	90	84	79	87	82	77	84	79	76	81	77	74	74	74	74	72		
3		92	82	74	68	89	80	73	67	77	71	66	74	69	65	72	67	64	64	64	64	61		
4		84	73	64	58	82	71	64	57	69	62	57	67	61	56	65	59	55	55	55	55	53		
5		78	65	57	50	76	64	56	50	62	55	50	60	54	49	58	53	48	48	48	48	46		
6		72	59	50	44	70	58	50	44	56	49	44	55	48	43	53	47	43	43	43	43	41		
7		67	54	45	39	65	53	45	39	52	44	39	50	44	39	49	43	38	38	38	38	36		
8		62	49	41	35	61	49	41	35	47	40	35	46	40	35	45	39	35	35	35	35	33		
9		58	45	37	32	57	45	37	32	44	37	32	43	36	32	42	36	31	31	31	31	30		
10		55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	29	29	29	27		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

Cone of Light		
4.0	3.56 fc	39.2 ft
8.0	0.89 fc	78.4 ft
12.0	0.4 fc	117.6 ft
16.0	0.22 fc	156.8 ft
20.0	0.14 fc	196 ft
24.0	0.1 fc	235.2 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.