

Project

Type



Date

Product Code

Designer

MINIMAX™ 16E W

track mounted MR16 LED wallwasher



MiniMax 16E W is a wallwasher designed for use with a 120-volt, GU10 base, 7.5 watt Sora MR16-GU10 flood lamps, supplied by others. Additional lamps may be suitable. Contact factory with inquiries.

- Fixture may be powered by one of eighteen 20-amp 120-volt track systems.
- The optical assembly consists of a hammered aluminum reflector and a 40° x 70° spread lens. In addition, the assembly can accept one of a number of optional [Optical Accessories](#) including color filters and screens. Assembly is keyed relative to luminaire housing, to retain critical lens orientation.
- A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°. The swivel is permanently tensioned, allowing the fixture to remain fixed at any aiming angle. Fixture can be fully locked in place, in both vertical and horizontal planes, simply by depressing a hinged ('lever lock') bar so that it lies flush with the top of the fixture. Locked in this way, fixture will maintain focus even when manipulated for re-lamping. Lifting the lever lock frees the swivel and allows re-aiming.
- MiniMax fixtures have seamless aluminum housings for lightweight durability and cast aluminum tops for heat dissipation. Standard finish is matte white; also available in black and Industrial Silver matte paint finishes.
- For more information, [click here](#).

PRODUCT CODE

Basic Unit MM-16E-W-2C

OPTIONS

Specify by adding to the product code.

- matte black housing finish - BLK
- Industrial Silver housing finish - SIL
- custom color paint housing finish
identify color in specification CCH

OPTICAL ACCESSORIES

Specify as separate line items.

All are 2 3/8" (60mm) dia. Filters are glass; screens are aluminum.

color filters

- Daylight Blue DAY/2.75
- Surprise Pink PNK/2.75
- blue BLU/2.75
- green GRN/2.75
- red RED/2.75
- 33% light reduction screen SCR33/2.75
- 50% light reduction screen SCR50/2.75

Lamp (By Others) Dimming Info

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories. For dimming compatibility consult the lamp manufacturer's website.

For the outlet box mounted version of this fixture, see [MiniMax 16E W-OBM](#).

MODIFICATIONS AVAILABLE

Contact factory with quantity for pricing; orders may require shop drawing approval.

For modified stem lengths up to 72", add the following to the end of the product code:
+ number of inches.



41-50 22ND STREET, LIC NY 11101 TEL 718.685.0700 FAX 718.786.8530 www.epl.com

©Copyright, Edison Price Lighting 2019

MiniMax is a pending trademark of Edison Price Lighting.


TF 11-113 10:19

MINIMAX 16E W

APPLICATIONS

Luminaire is suitable for highlighting vertical surfaces in museums, galleries, showrooms, residences, offices and stores.

Fixture is  listed for mounting on Edison Price Lighting 120-volt track only.

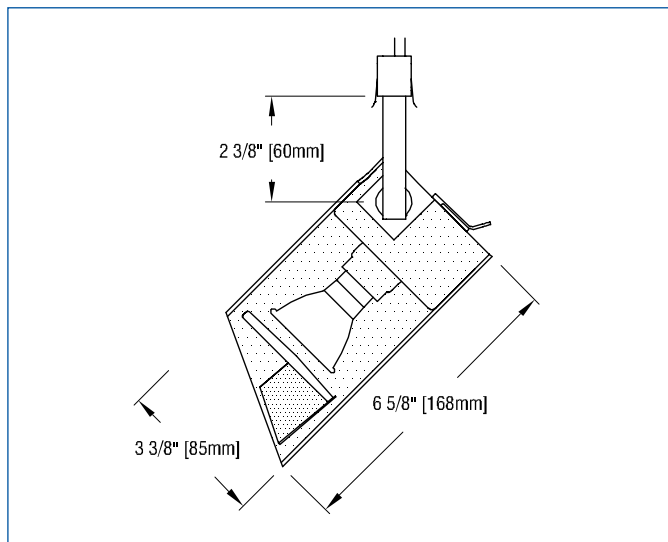

For current Sora MR16-GU10 lamp performance data, consult www.soraa.com.